

LOC/DME I-MKE 110.3 Chan 40	APP CRS 011°	Rwy Idg TDZE Apt Elev	1L 9080 704 728	1R 4182 678 728
---	------------------------	-----------------------------	---	---

ILS or LOC RWY 1L


GENERAL MITCHELL INTL (MKE)

DME or RADAR required.

ALSIF-2
Rwy 1L

MISSED APPROACH: Climb to 1200 then climbing left turn to 2900 direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
------------------------	---	--	---------------------------------	--------------------------	-------

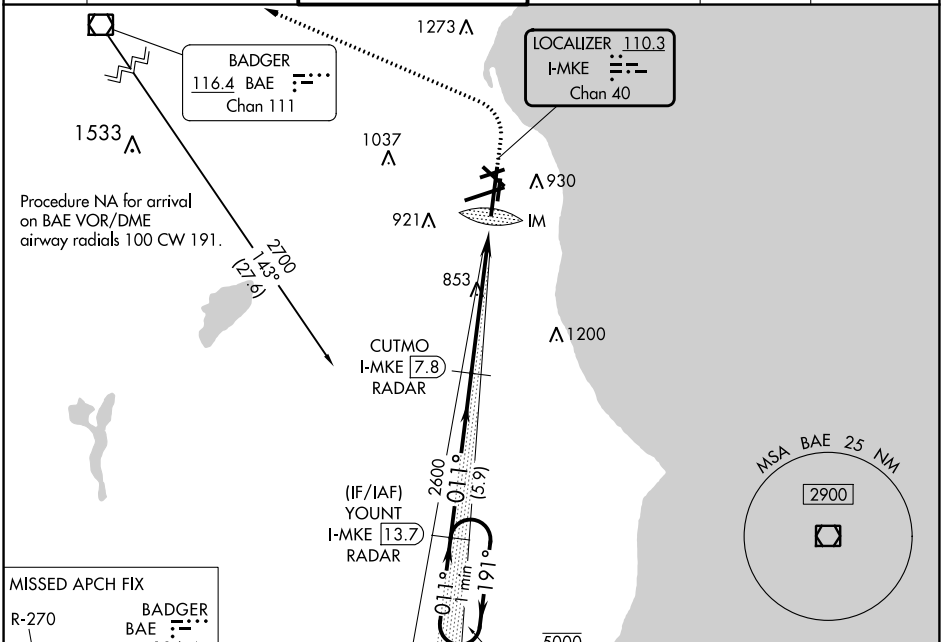

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).

One Minute Holding Pattern

5000
2700

191°
011°

GS 3.00°
TCH 56

YOUNT I-MKE 13.7
RADAR

CUTMO I-MKE 7.8
RADAR

I-MKE 3.1
RADAR

I-MKE 2
RADAR

IM

5.9 NM

4.6 NM

1.1 NM

0.1

CATEGORY	A	B	C	D
S-ILS 1L	904/18 200 (200-½)			
S-LOC 1L	1140/24 436 (500-½)		1140/40 436 (500-¾)	
SIDESTEP 1R	1140-1 462 (500-1)		1140-1½ 462 (500-1½)	1140-2 462 (500-2)
CIRCLING	1240-1 512 (600-1)		1240-1½ 512 (600-1½)	1360-2 632 (700-2)

ELEV 728 TDZ/CL Rwy 1L

REIL Rwy 1R, 7L, 13, 25L, 25R and 31

TDZE 1L 704

TDZE 1R 678

HIRL Rwy 1L-19R and 7R-25L

MIRL Rwy 1R-19L, 13-31, and 7L-25R

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56