

APP CRS

Rwy Idg

256°

TDZE

7867

683



Apt Elev


729

RNAV (RNP) Y RWY 25L

GENERAL MITCHELL INTL (MKE)

RF required. RNP AR APCH.			MISSED APPROACH: Climb to 3700 on the RNAV missed approach route to PROOT and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					
D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON	CLNC DEL	CPDLC
126.4	126.5 307.0	124.575 269.05	121.8 263.125	120.8	

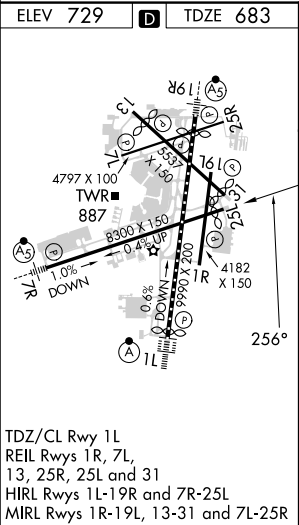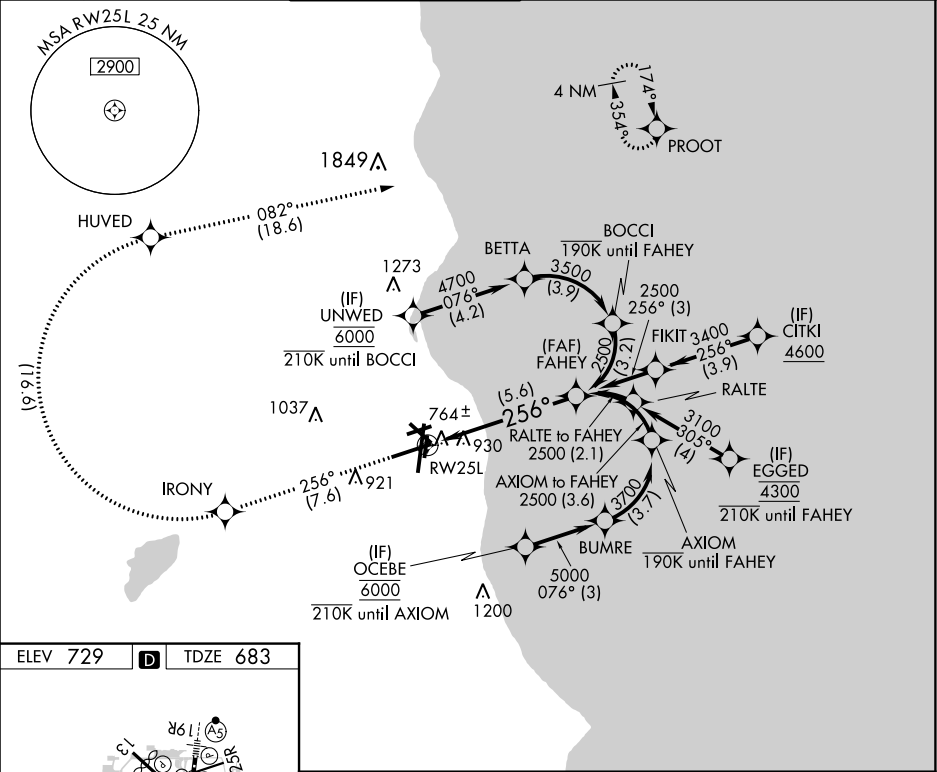

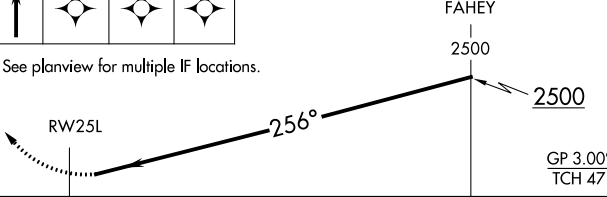3700	IRONY	HUVED	PROOT	
				
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.10 DA	1087-1 $\frac{3}{8}$		404 (400-1 $\frac{3}{8}$)	
RNP 0.30 DA	1256-2		573 (600-2)	
AUTHORIZATION REQUIRED				