

LOC I-VIY	APP CRS	Rwy Idg	20R 7702	20C 8001
<u>111.3</u>	201°	TDZE	578	588
		Apt Elev	599	599


ILS or LOC RWY 20R
NASHVILLE INTL (BNA)

T Simultaneous approach authorized with Rwy 20L. DME or
A radar required. For inop ALS, increase S-LOC 20R
Cat D visibility to 1¼ SM. DME from BNA VORTAC.
Simultaneous reception of I-VII and BNA DME required.


MALSF

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 300° and on BNA VORTAC R-270 to BEVEE/BNA 22.4 DME and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
-----------------	----------------------------------	--------------------------------	------------------------	--------------------	-------

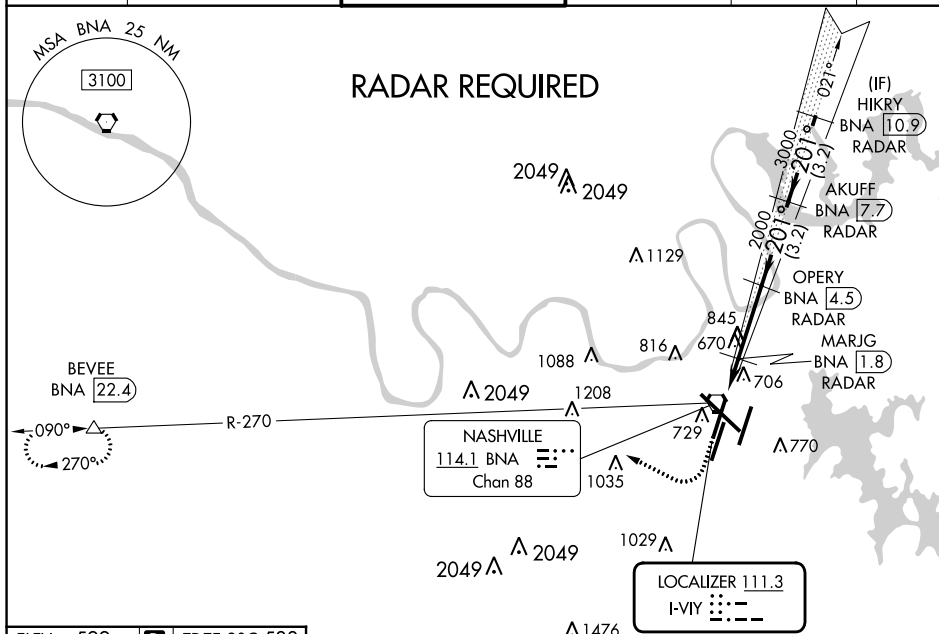

ELEV 599	D	TDZE 20C 588
		TDZE 20R 578

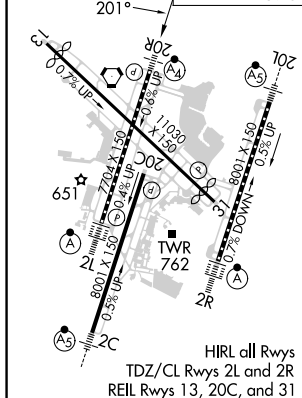

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

NASHVILLE, TENNESSEE

Amdt 11 27APR17

1200 ↑ 4000 hdg 300°	BNA R-270 		VGS1 and ILS glidepath not coincident (VGS1 Angle 3.00/TCH 79).		HIKRY BNA 10.9 RADAR
*LOC only	BNA 0.3 MARJG BNA 1.8 RADAR OPERY BNA 4.5 RADAR 2000 AKUFF BNA 7.7 RADAR 201° 4000 3000 GS 3.00° TCH 60				
CATEGORY	A	B	C	D	
S-ILS 20R	778/40 200 (200-¾)				
S-LOC 20R	1000/40	422 (500-¾)	1000/50	422 (500-1)	
SIDESTEP 20C	1000-1	412 (500-1)	1000-1½ 412 (500-1½)	1000-2 412 (500-2)	
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)	

NASHVILLE INTL (BNA)

ILS or LOC RWY 20R

36°07'N-86°41'W

SE-1, 16 MAY 2024 to 13 JUN 2024

SE-1, 16 MAY 2024 to 13 JUN 2024