



APP CRS	Rwy Idg	9800
176°	TDZE	1282
	Apt Elev	1296

RNAV (RNP) Z RWY 17R

WILL ROGERS WORLD (OKC)

RNP AR APCH.	For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. ASR For inop ALS, increase RNP 0.20 all Cnts visibility to RVR 4500 and RNP 0.30 all Cnts visibility to RVR 6000. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.	MALSR 	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct JESKE and hold.
--------------	--	-----------	--

D-ATIS 125.85	OKE CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6	CLNC DEL 124.35
------------------	---------------------------------	-------------------------------	------------------------	--------------------

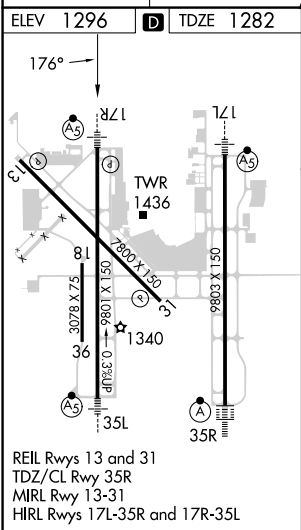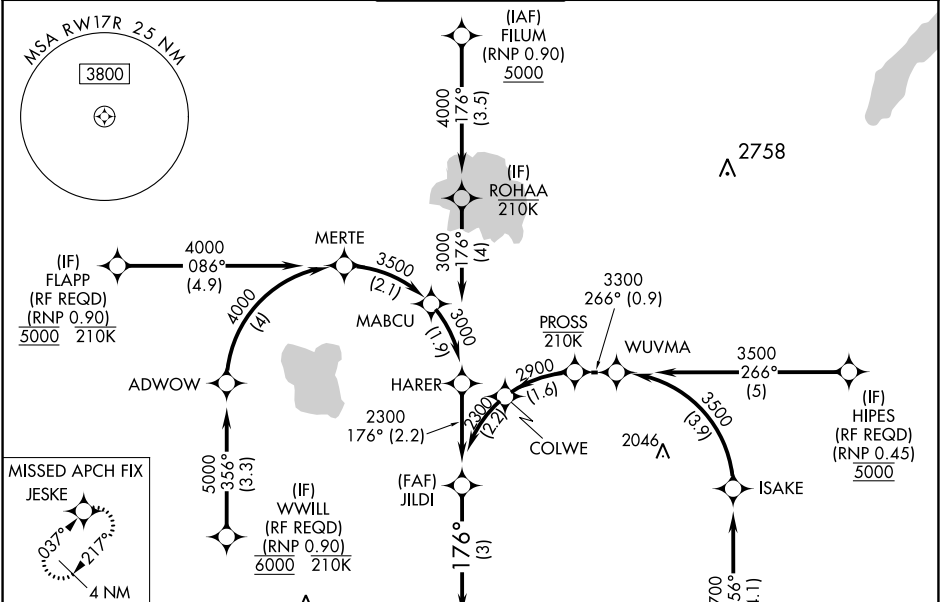

1608 RW17R 1631 1416 1881 (IF) PALMR (RF REQD) (RNP 0.45) 6000 210K 1953		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).		2000 3000 JESKE
2300 GP 3.00° TCH 55		176° See planview for multiple IF locations.		RW17R
3 NM				
CATEGORY	A	B	C	D
RNP 0.20 DA	1559/24		277 (300-½)	
RNP 0.30 DA	1677/35		395 (400-⅝)	
AUTHORIZATION REQUIRED				