

ST. JOSEPH, MISSOURI

AL-359 (FAA)

24025

STJ VORTAC	APP CRS	Rwy Idg	8061
115.5		TDZE	815
Chan 102	348°	Apt Elev	827

VOR or TACAN RWY 35
ROSECRANS MEML (STJ)


DME required.

MISSED APPROACH: Climb to 2700 then climbing right turn to 3100 on heading 090° and STJ VORTAC R-114 to HANOT/24 DME and hold.

TA

ASR/PAR

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9 (CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

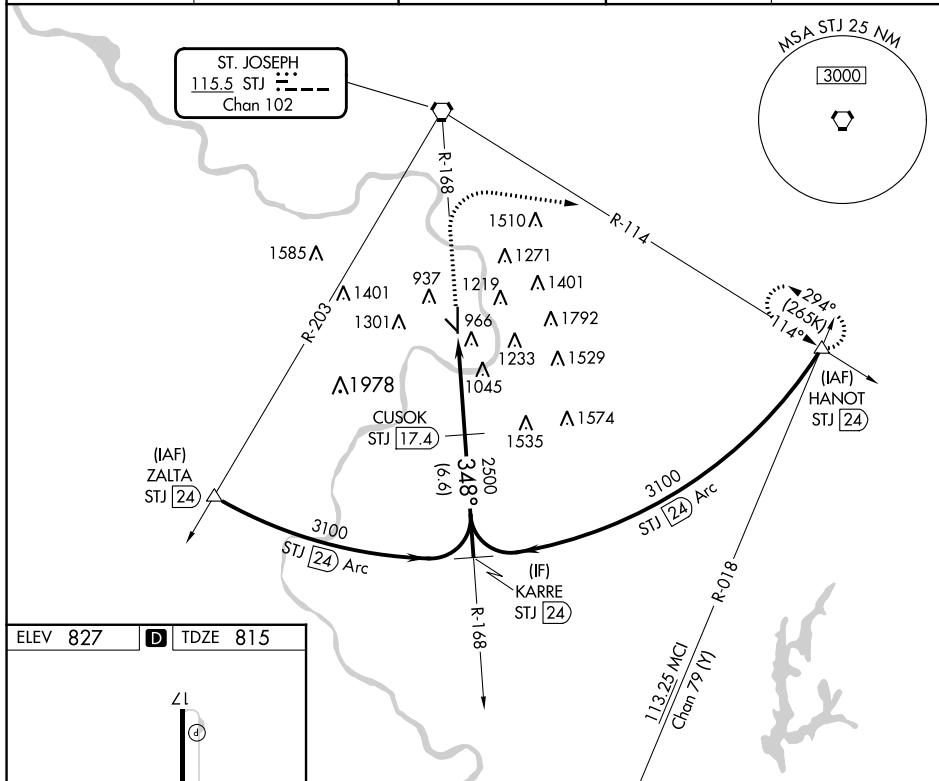

ELEV 827	D	TDZE 815
----------	----------	----------

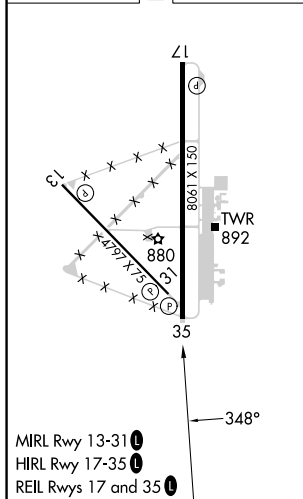


Diagram illustrating the STAR procedure for runway 24. The diagram shows a 348° heading from the 2500m fix to the runway. Key points include the 2700m and 3100m headings, the 11.9 NM and 13.5 NM distances from the 2500m fix, and the 1.6 NM, 3.9 NM, and 6.6 NM distances from the runway. The diagram also shows the 2500m fix, the 2500m distance from the 2500m fix, and the 2500m distance from the 2500m fix.

ST. JOSEPH, MISSOURI
Orig-B 20JUN19

39°46'N-94°55'W

ROSECRANS MEML (STJ)

VOR or TACAN RWY 35

NC-3, 16 MAY 2024 to 13 JUN 2024

NC-3, 16 MAY 2024 to 13 JUN 2024