

NDB SJ 356	APP CRS 038°	Rwy Idg	5940
		TDZE	1917
		Apt Elev	1919

NDB RWY 3

SAN ANGELO RGNL/MATHIS FLD (SJT)





For inop ALS, increase Cat A/B visibility to RVR 5500, and Cat C/D to 2 SM.



MALSR


MISSED APPROACH: Climbing right turn to 4000 direct SJ NDB and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3 (CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-------------------------

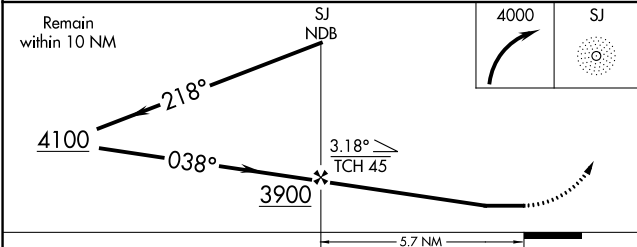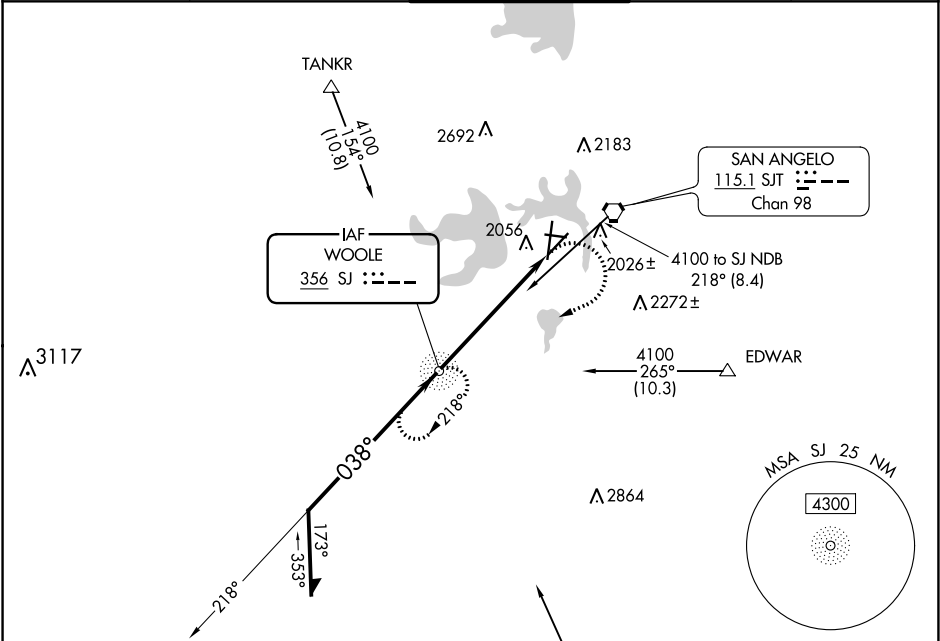

ELEV 1919 TDZE 1917

MIRL Rwy 9-27 and 18-36
HIRL Rwy 3-21
REIL Rwy 18

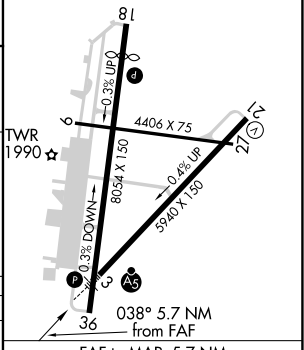

CATEGORY	A	B	C	D
S-3	2640/40	723 (800-¾)	2640-1½	723 (800-1½)
CIRCLING	2640-1	721 (800-1)	2640-2	2700-2½

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54