

WAAS
CH **93506**
W05A

APP CRS
061°

Rwy Idg
TDZE **3952**
Apt Elev **3967**

RNAV (GPS) RWY 5

WESTERN NEBRASKA RGNL/WM B HEILIG FLD/SCOTTSLUFF (BFF)

RNP APCH.


▼

▲

Baro-VNAV NA when using Alliance altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 51°C (124°F). When local altimeter setting not received, use Alliance altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LPV all Cats visibility ⅓ mile, LNAV/VNAV all Cats visibility ¼ mile, LNAV Cats C/D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile.

MISSED APPROACH:
Climb to 4400 then climbing right turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.

ASOS 121.025	DENVER CENTER 127.95 338.2	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

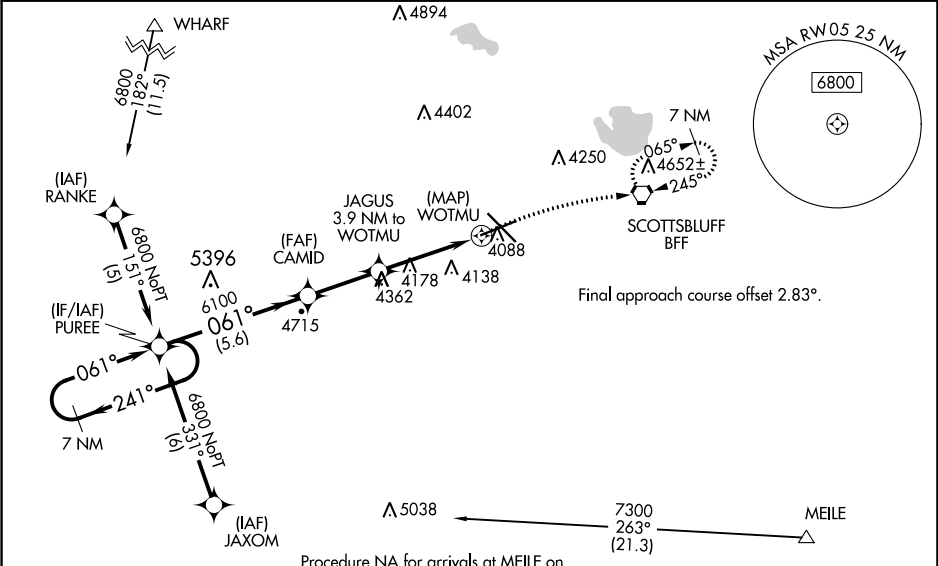

ELEV 3967	TDZE 3952
-----------	-----------

7 NM Holding Pattern PUREE

GP 3.00° TCH 50

6800

241°

061°

6100

061°

5.6 NM

2.7 NM

3.9 NM

4400

6900

BFF

*LNAV only

WOTMU

CATEGORY	A	B	C	D
LPV DA	4202-1		250 (300-1)	
LNAV/VNAV DA	4418-1½		466 (500-1½)	
LNAV MDA	4480-1	528 (600-1)	4480-1½	528 (600-1½)
CIRCLING	4500-1	533 (600-1)	4560-1½ 593 (600-1½)	4720-2½ 753 (800-2½)

8002 X 150

8002 X 150

4006

061°

HIRL Rwy 12-30

MIRL Rwy 5-23