

SPOKANE, WASHINGTON

AL-403 (FAA)

23334

LOC/DME I-OLJ <u>111.1</u> Chan 48	APP CRS 031°	Rwy Idg 11002 TDZE 2385 Apt Elev 2385
--	------------------------	--

ILS or LOC RWY 3

SPOKANE INTL (GEG)

DME required for localizer only.


T	For inop ALS, increase S-LOC 3 Cat C/D visibility to
A	RVR 5500.

ALSF-2




MISSED APPROACH: Climb to 2900 then climbing left turn to 4200 direct GEG VORTAC and hold, continue climb-in-hold to 4200.

ATIS	SPOKANE APP CON		SPOKANE TOWER	GND CON	CLNC DEL
124.325 254.375	123.75 282.25 (205°-025°)	133.35 263.0 (026°-204°)	118.3 278.3	121.9 348.6	127.55

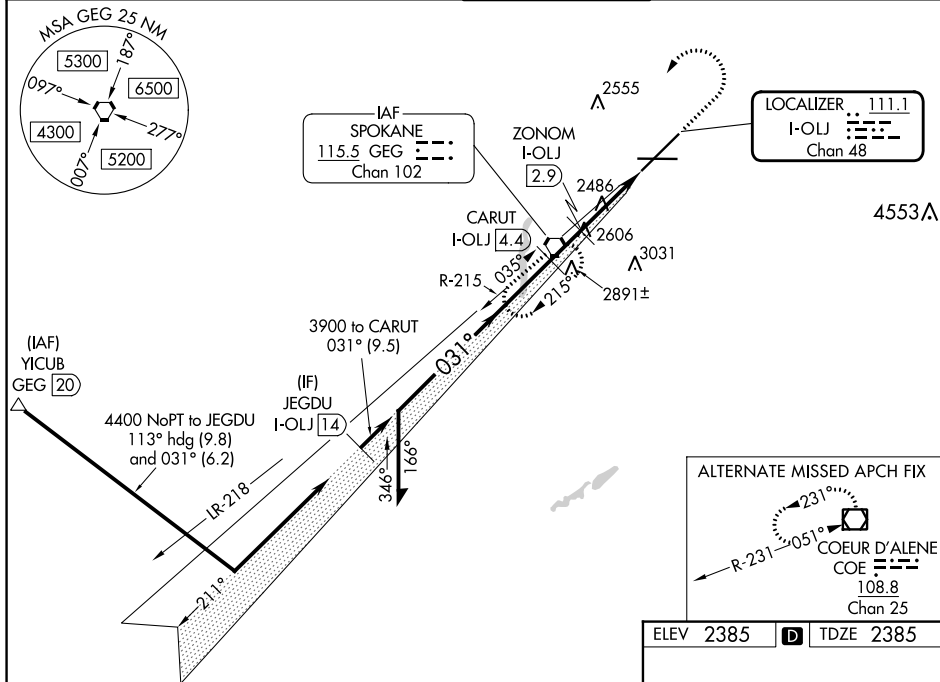[illegible]

CATEGORY	A	B	C	D
S-ILS 3	2585/18 200 (200-½)			
S-LOC 3	2780/24 395 (400-½)	2780/35 395 (400-¾)		
C CIRCLING	2960-1 575 (600-1)	2980-1 595 (600-1)	3180-2¼ 795 (800-¼)	3380-3 995 (1000-3)

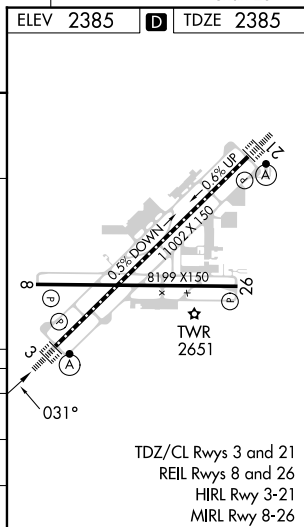

SPOKANE, WASHINGTON

Amdt 7B 15JUN23

47°37'N-117°32'W

SPOKANE INTL (GEG)

ILS or LOC RWY 3

TDZ/CL Rwy 3 and 21
REIL Rwy 8 and 26
HIRL Rwy 3-21
MIRL Rwy 8-26