



HI-ILS or LOC Z RWY 4L

ATIS ★	SHAW APP CON	SHAW TOWER ★	GND CON	CLNC DEL
132.125 270.1	125.4 318.1	126.65 254.25	126.1 275.8	126.1 275.8

CAUTION: When VGSI inop, procedure NA at night.



EMERG SAFE ALT 100 NM 3800

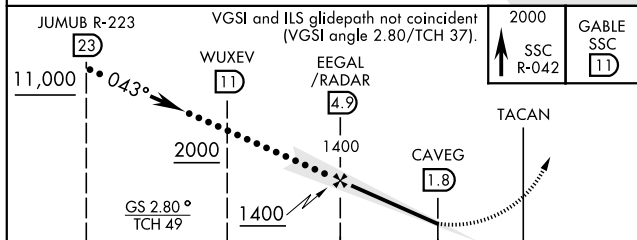

		← 3.1 NM →		0.6	
CATEGORY	C		D	E	
S-ILS 4L *	490/50		250	(300-1)	
S-LOC 4L *	780/55		540	(600-1)	
SIDESTEP * 4R	780-1 ⅜		544	(600-1⅜)	
C CIRCLING	1000-2¼ 759 (800-2¼)		1000-2½ 759 (800-2½)	1000-2¾ 759 (800-2¾)	

SHAW AFB (KSSC)

Amdt 1 10OCT19

HI-ILS or LOC Z RWY 4L