

WAAS CH 61311 W04A	APP CRS 043°	Rwy Idg TDZE 24 Apt Elev 24	4974
--	------------------------	---	-------------

RNAV (GPS) RWY 4

VERO BEACH RGNL (VRB)


⚠

⚠

Circling to Rwy 30R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 320 feet; increase LNAV/VNAV DA to 378 feet and all visibilities 1/8 SM; increase all MDAs 40 feet and LNAV Cat C/D and Circling Cat C/D visibility 1/4 SM. Baro-VNAV and VDP NA when using Fort Pierce altimeter setting. Rwy 4 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 2000 direct
OJEMY and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4 (N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	CLNC DEL 134.975	UNICOM 122.95
------------------------	--	---	--------------------------	----------------------------	-------------------------

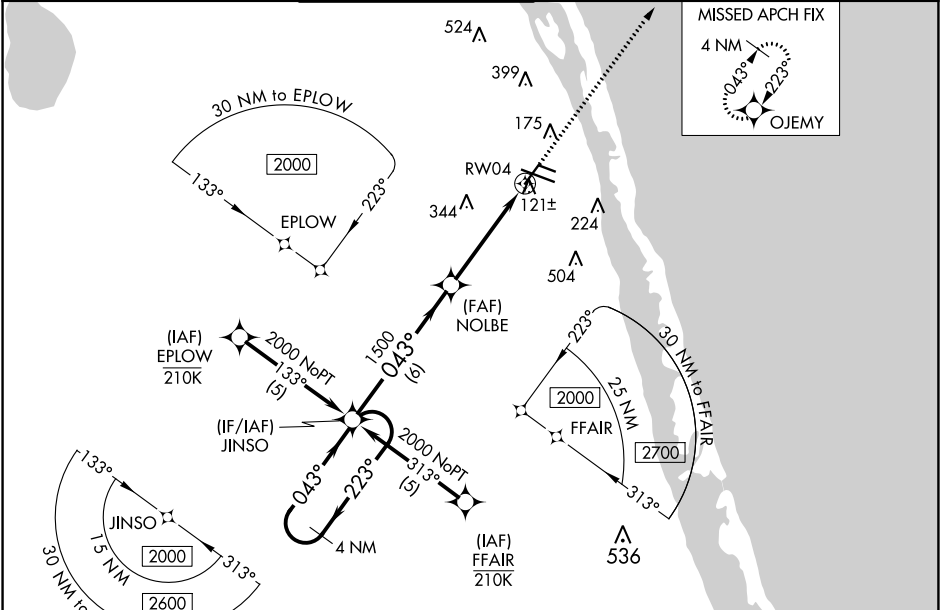

4 NM Holding Pattern

JINSO

2000

223°

043°

GP 3.00°

TCH 40

2000

OJEMY

1500

NOLBE

1500

RW04

*1.3 NM to RW04

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	297-7/8	273 (300-7/8)		
LNAV/VNAV DA	355-1/8	331 (400-1/8)		
LNAV MDA	480-1	456 (500-1)	480-13/8	456 (500-13/8)
CIRCLING	560-1	536 (600-1)	660-13/4	820-2/2

ELEV 24

TDZE 24

MIRL Rwy 4-22, 12R-30L, and 12L-30R

REIL Rwy 4, 12R, 22 and 30L