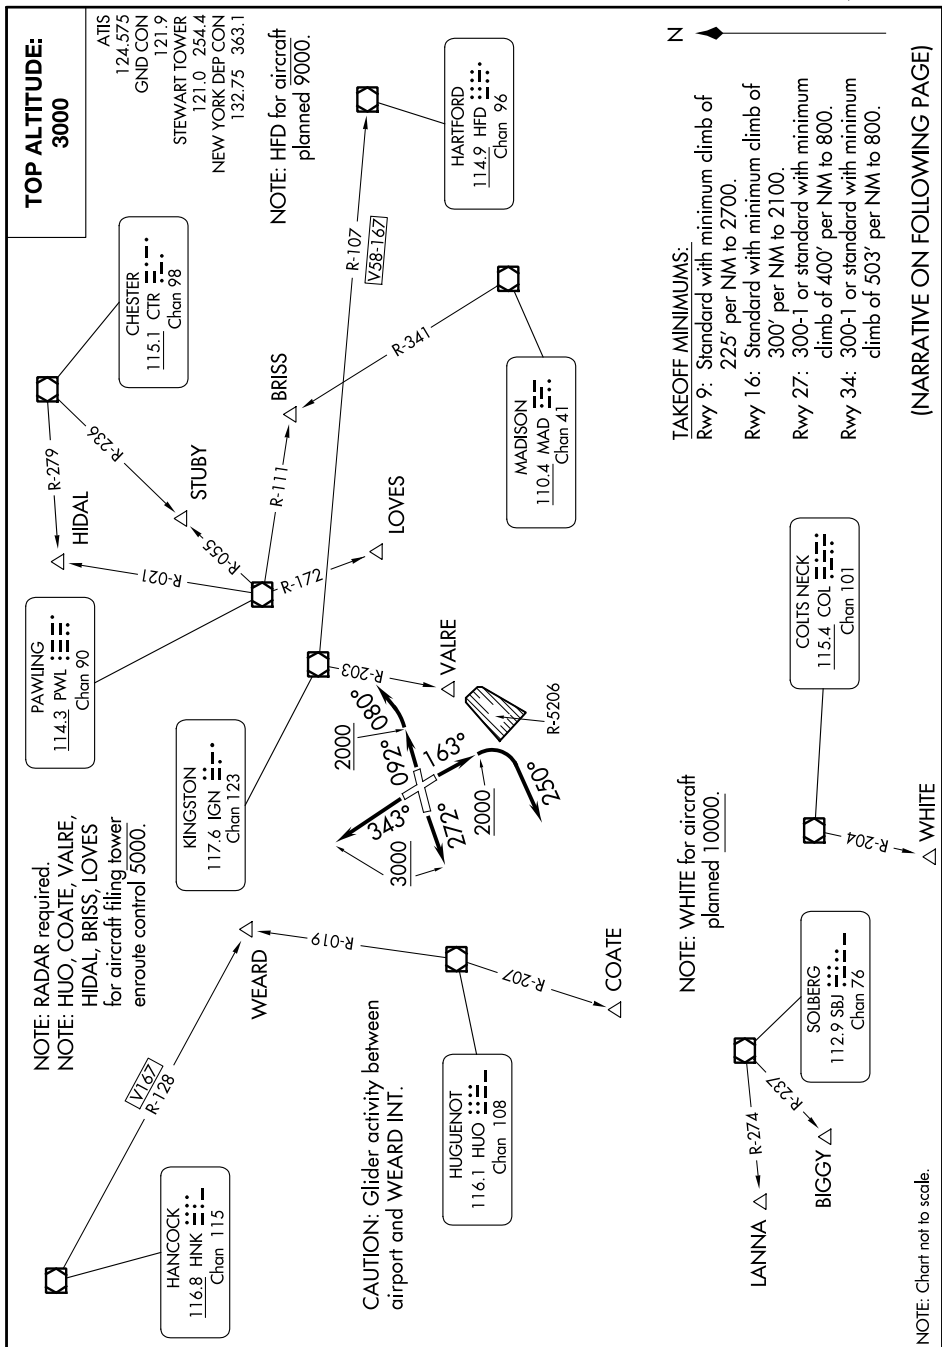


STEWART NINE DEPARTURE

AL-450 (FAA)

NEW YORK STEWART INTL (SWF)
NEW YORK, NEW YORK

NOTE: RADAR required.
NOTE: HUO, COATE, VAO
HIDAL, BRISS, LO
for aircraft filing to
enroute control 50

TOP ALTITUDE:
3000

ATIS	124.575
GND CON	121.9
STEWART TOWER	121.0 254.4
NEW YORK DEP CON	132.75 363.1

NOTE: HFD for aircraft planned 9000.

CAUTION: Glider activity between airport and WEARD INT.

NOTE: WHITE for aircraft planned 10000.

TAKEOFF MINIMUMS:

Rwy 9: Standard with minimum climb of 225' per NM to 2700.

Rwy 16: Standard with minimum climb of 300' per NM to 2100.

Rwy 27: 300-1 or standard with minimum climb of 400' per NM to 800.

Rwy 34: 300-1 or standard with minimum climb of 503' per NM to 800.

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

NE-2, 18 APR 2024 to 16 MAY 2024