

WAAS CH 40303 W21A	APP CRS 211°	Rwy Idg TDZE 404 Apt Elev 410	7110
--	------------------------	---	-------------

RNAV (GPS) Y RWY 21R

TRI-CITIES (PSC)


⚠

Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility 3⁄8 mile; LNAV Cat C and D visibility 3⁄8 mile and Circling Cat C and D visibility 1⁄4 mile. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hermiston altimeter setting.

MALSR

MISSED APPROACH:
Climb to 1100 then climbing right turn to 5200 direct PAIDS and hold, continue climb-in-hold to 5200.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

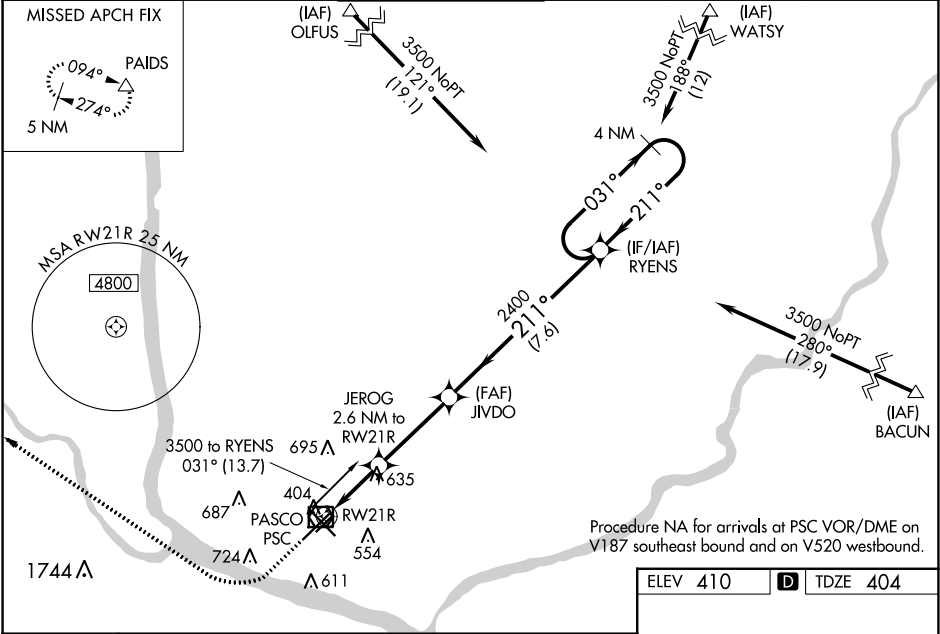

1100 5200 PAIDS	↑ 1100 ↘ 5200 △ PAIDS			
LNAV only	JEROG 2.6 NM to RW21R 2400 RYENS 1.5 NM to RW21R 1.1 NM 3.5 NM 7.6 NM 1280 2400 1.5 NM 1.1 NM 3.5 NM 7.6 NM 1280* 2400			
CATEGORY	A	B	C	D
LPV DA#	604/24		200 (200-1⁄2)	
LNAV/VNAV DA	844/51		440 (500-1)	
LNAV MDA	940/24 536 (600-1⁄2)		940/55 536 (600-1)	
CIRCLING	940-1 530 (600-1)		1040-1 3⁄4 630 (700-1 3⁄4)	1100-2 1⁄4 690 (700-2 1⁄4)

ELEV 410

D

TDZE 404

REIL Rwy 3L and 12

MIRL Rwy 12-30

HIRL Rwy 3L-21R