


WAAS CH 97518 W25A	APP CRS 256°	Rwy Idg TDZE Apt Elev	6248 5507 5507
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25
FOUR CORNERS RGNL (FMN)

RNP APCH-GPS.		MISSED APPROACH: Climb to 8000 direct HASIT and hold.
▼ ▲	Baro-VNAV and VDP NA when using Durango altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase LPV DA to 5950 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 6312 feet and all visibilities ¾ SM. Increase all MDAs 260 feet and LNAV visibilities Cat C/D ¾ SM, and Circling visibility Cat B ¼ SM and Cat C ½ SM.	

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER ★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	---------------------------------------	---	-------------------------	-------------------------

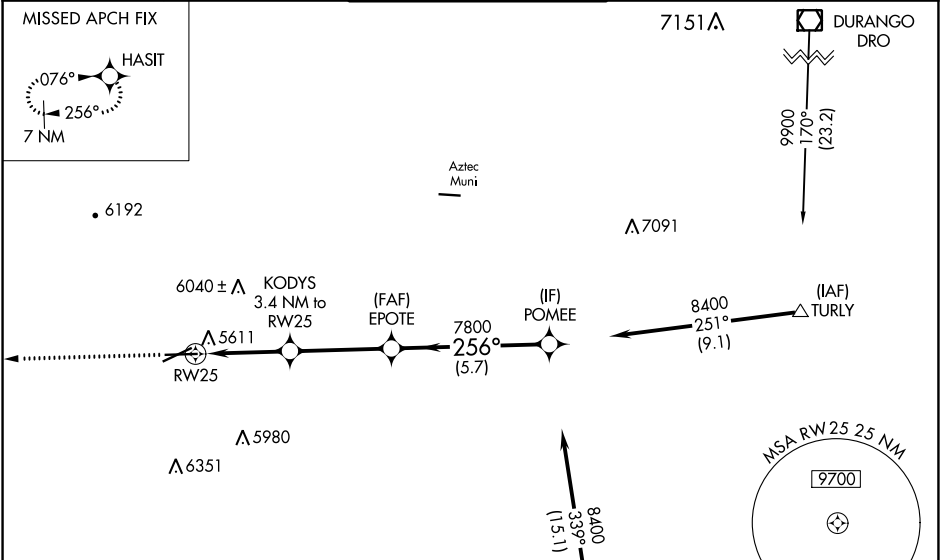

ELEV 5507	D	TDZE 5507
-----------	---	-----------

8000 HASIT		POMEE			
KODYS 3.4 NM to RW25		EPOTE 7800		8400	
1.9 NM to RW25		6640		GP 3.00° TCH 56	
RW25		7800		7800	
CATEGORY		A	B	C	D
LPV DA		5707-¾		200 (200-¾)	
LNAV/VNAV DA		6069-1½		562 (600-1½)	
LNAV MDA		5880-1		373 (400-1)	
CIRCLING		6020-1 513 (600-1)	6140-1 633 (700-1)	6380-2½ 873 (900-2½)	6400-3 893 (900-3)