


LOC I-RUM	APP CRS	Rwy Idg	5601
108.7	126°	TDZE	593
		Apt Elev	595

ILS or LOC RWY 13

SAN MARCOS RGNL (HYI)

ADF required.	MALS	MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.
NA Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to S-ILS 13 all Cats. For inop ALS, increase S-LOC 13 Cat C/D/E visibility to 1⅞ SM.		

ATIS ★	AUSTIN APP CON	SAN MARCOS TOWER ★	GND CON	CLNC DEL	CLNC DEL
120.825	119.0 370.85	126.825 (CTAF) 0	120.125	120.125	121.35 (when twr closed)

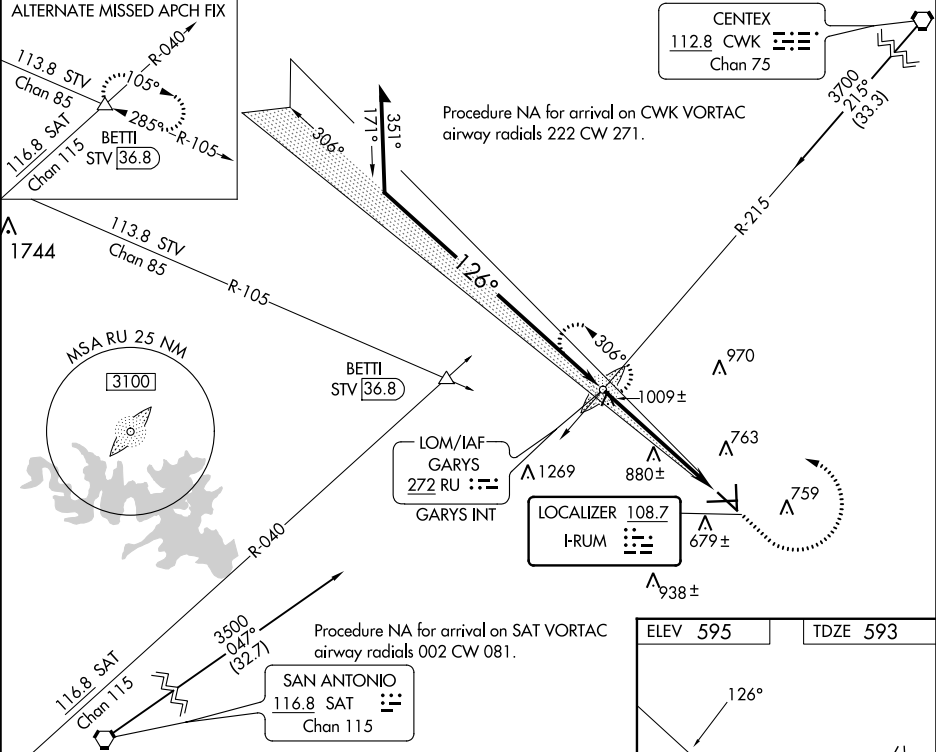

	RU LOM GARYS INT				
	2441				
	3200				
	2700				
CATEGORY	A	B	C	D	E
S-ILS-13	793-¾ 200 (200-¾)				
S-LOC-13	1260-¾ 667 (700-¾)		1260-1¾ 667 (700-1¾)		
CIRCLING	1260-1 665 (700-1)		1260-1⅞ 665 (700-1⅞)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)