


WAAS CH 86232 W13A	APP CRS 126°	Rwy Idg 5601 TDZE 593 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)

RNP APCH-GPS. ⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.				MALS  	MISSED APPROACH: Climb to 3000 direct HODAL and hold.
ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)

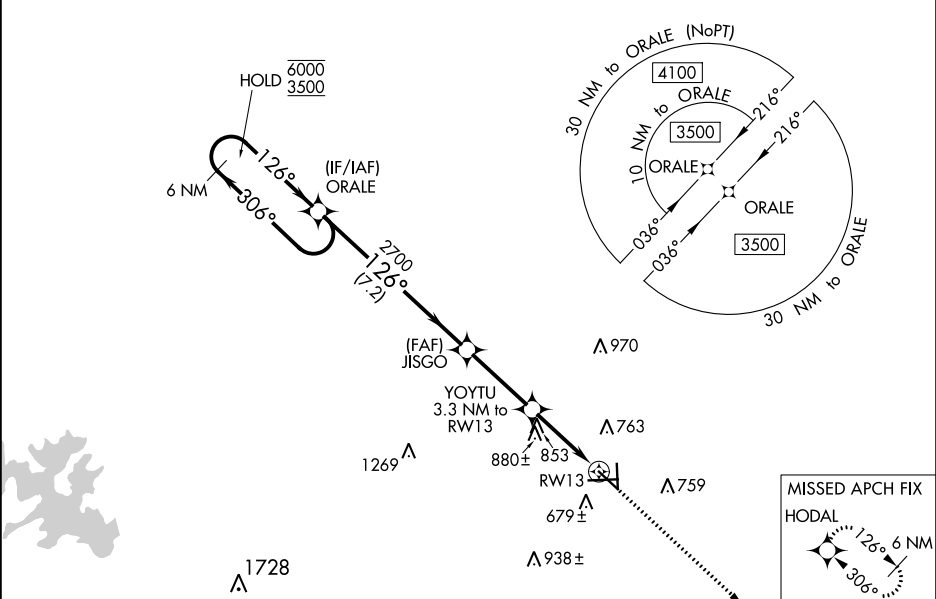

6 NM Holding Pattern ORALE JISGO 2700 YOYTU 3.3 NM to RW13 1.5 NM to RW13 RW13 3000 HODAL 6000 ← 306° 3500 → 126° GP 3.00° TCH 57 2700 1700 7.2 NM 3.1 NM 1.8 NM 1.5 NM					
CATEGORY	A	B	C	D	E
LPV DA	793-¾ 200 (200-¾)				
LNAV/VNAV DA	946-¾ 353 (400-¾)				
LNAV MDA	1120-¾	527 (600-¾)	1120-1¼ 527 (600-1¼)		
CIRCLING	1120-1	525 (600-1)	1240-1¾ 645 (700-1¼)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

ELEV 595

TDZE 593

126°

5601 X 100

6330 X 100

TWR

521.4 X 100

26

35

0.4% UP

0.4% UP

13

26

92

126°

MIRL Rwy 8-26, 13-31, and 17-35