


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>90432</b><br><b>W31A</b> | APP CRS<br><b>306°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5601</b><br><b>583</b><br><b>595</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 31  
SAN MARCOS RGNL (HYI)


**⚠** Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C/D/E and Circling Cat C/D visibility 1/4. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
Climb to 3500 direct  
ORALE and hold.

|                          |                                       |                                                     |                           |                            |                                                |
|--------------------------|---------------------------------------|-----------------------------------------------------|---------------------------|----------------------------|------------------------------------------------|
| ATIS ★<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER★<br><b>126.825</b> (CTAF) <b>📶</b> | GND CON<br><b>120.125</b> | CLNC DEL<br><b>120.125</b> | CLNC DEL<br><b>121.35</b><br>(when twr closed) |
|--------------------------|---------------------------------------|-----------------------------------------------------|---------------------------|----------------------------|------------------------------------------------|

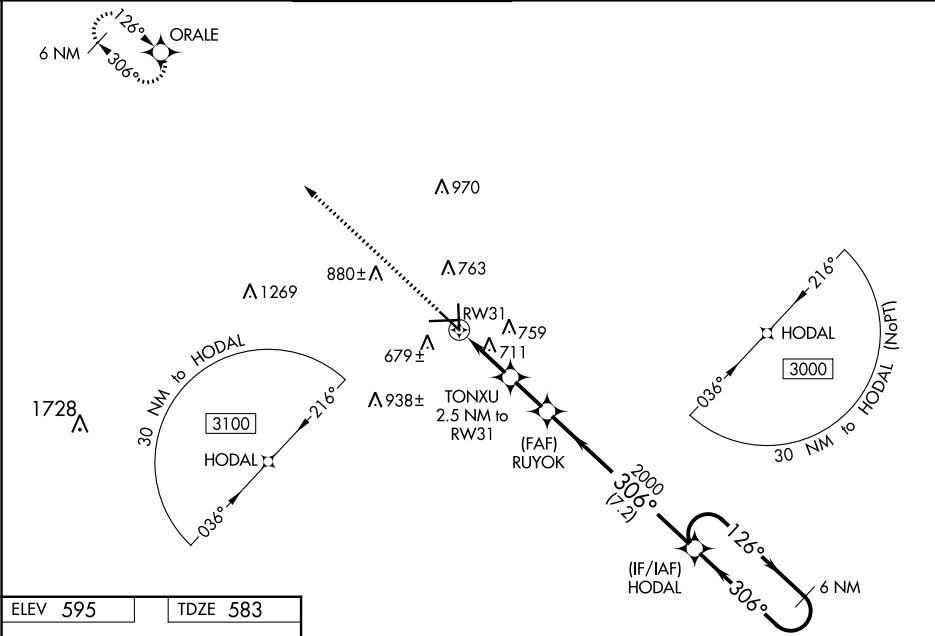

|                 |                 |
|-----------------|-----------------|
| ELEV <b>595</b> | TDZE <b>583</b> |
|-----------------|-----------------|

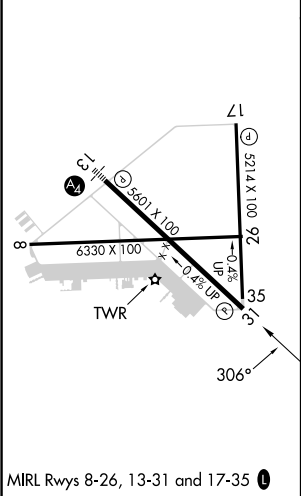

|                  |                       |                            |                               |                               |                               |
|------------------|-----------------------|----------------------------|-------------------------------|-------------------------------|-------------------------------|
| 3500<br>↑        | ORALE<br>             |                            |                               |                               |                               |
| *LNAV only.      |                       | TONXU<br>2.5 NM to<br>RW31 | RUYOK<br>2000                 | 126°→<br>←306°                | 3000                          |
|                  |                       | *1.1 NM to<br>RW31         | *1420                         | 2000                          | GP 3.00°<br>TCH 60            |
| 1.1 NM           |                       | 1.4 NM                     | 1.8 NM                        | 7.2 NM                        |                               |
| CATEGORY         | A                     | B                          | C                             | D                             | E                             |
| LPV DA           | 860-7/8 277 (300-7/8) |                            |                               |                               |                               |
| LNAV/<br>VNAV DA | 906-1 323 (400-1)     |                            |                               |                               |                               |
| LNAV MDA         | 980-1 397 (400-1)     |                            | 980-1 3/8 397 (400-1 3/8)     |                               |                               |
| CIRCLING         | 1080-1<br>485 (500-1) | 1120-1<br>525 (600-1)      | 1240-1 3/4<br>645 (700-1 3/4) | 1320-2 1/4<br>725 (800-2 1/4) | 1340-2 3/4<br>745 (800-2 3/4) |