

WAAS CH 90229 W36A	APP CRS 355°	Rwy Idg 12250 TDZE 496 Apt Elev 542
--	------------------------	--

RNAV (GPS) Y RWY 36L

AUSTIN-BERGSTROM INTL (AUS)



RNP APCH-GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/ VNAV Cat E visibility to 1 3/4 SM, LNAV Cat E visibility to 1 1/4 SM. Inop table does not apply to LPV all Cats.

MALS
④

MISSED APPROACH: Climb to 1700 then climbing left turn to 3500 direct GARDS and hold.

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (EAST) 120.875 270.25 (SOUTH) 119.0 370.85 (WEST)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6	CLNC DEL 125.5 263.0	CPDLC
------------------------	---	------------------------------------	-------------------------------	--------------------------------	-------

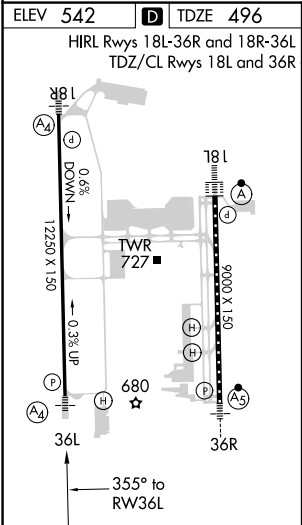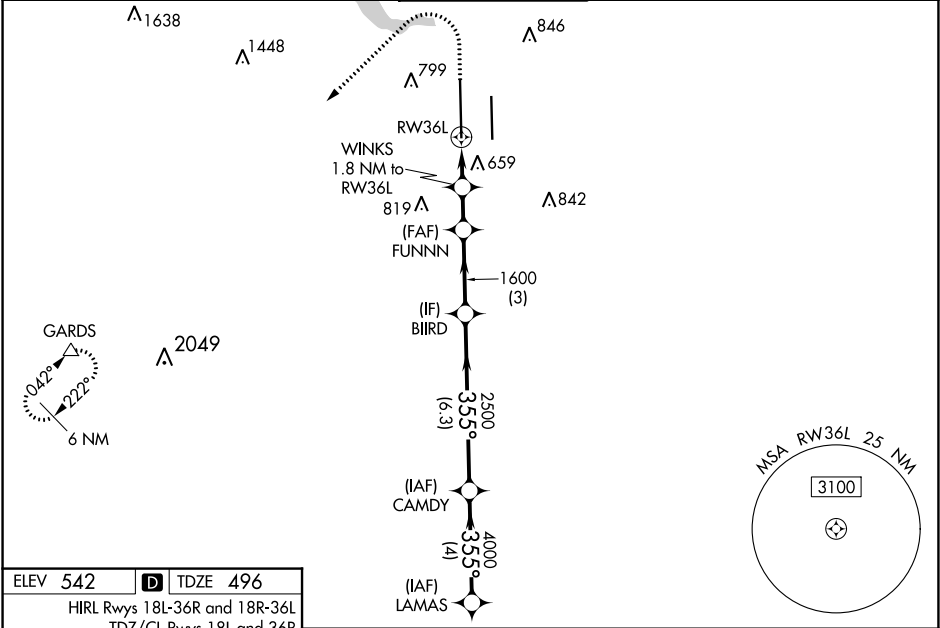

1700	3500	GARDS △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).				LAMAS
*LNAV only.			FUNNN 1600	BIIRD	CAMDY	5000	
RW36L		*1.2 NM to RW36L	WINKS 1.8 NM to RW36L	2500	355°	4000	
1.2 NM		0.6	1.5 NM	3 NM	6.3 NM	4 NM	
CATEGORY		A	B	C	D	E	
LPV	DA	696/40 200 (200-¾)					
LNAV/ VNAV	DA	970/60 474 (500-1¼)					
LNAV	MDA	920/40	424 (400-¾)	920/50	424 (400-1)		
CIRCLING		1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¼)	1200-2 658 (700-2)	1520-3 978 (1000-3)	

SC-3, 16 MAY 2024 to 13 JUN 2024

SC-3, 16 MAY 2024 to 13 JUN 2024