


SL-561 [USAF]		CAMP SPRINGS, MARYLAND						
ATIS 133.675 251.05	Rwy	Knots	60	120	180	240	300	360
CPDLC	1L/R	V/V(fpm)	380	760	1140	1520	1900	2280
GND CON								
121.8 275.8								
ANDREWS TOWER								
118.4 349.0								
POTOMAC TRACON DEP CON								
118.95 257.2								

ATIS 133.675 251.05
CPDLC
GND CON
121.8 275.8
ANDREWS TOWER
118.4 349.0
POTOMAC TRACON DEP CON
118.95 257.2

ATC Climb Rate to 3000

If unable to make published climb gradient
advise ATC prior to departure.

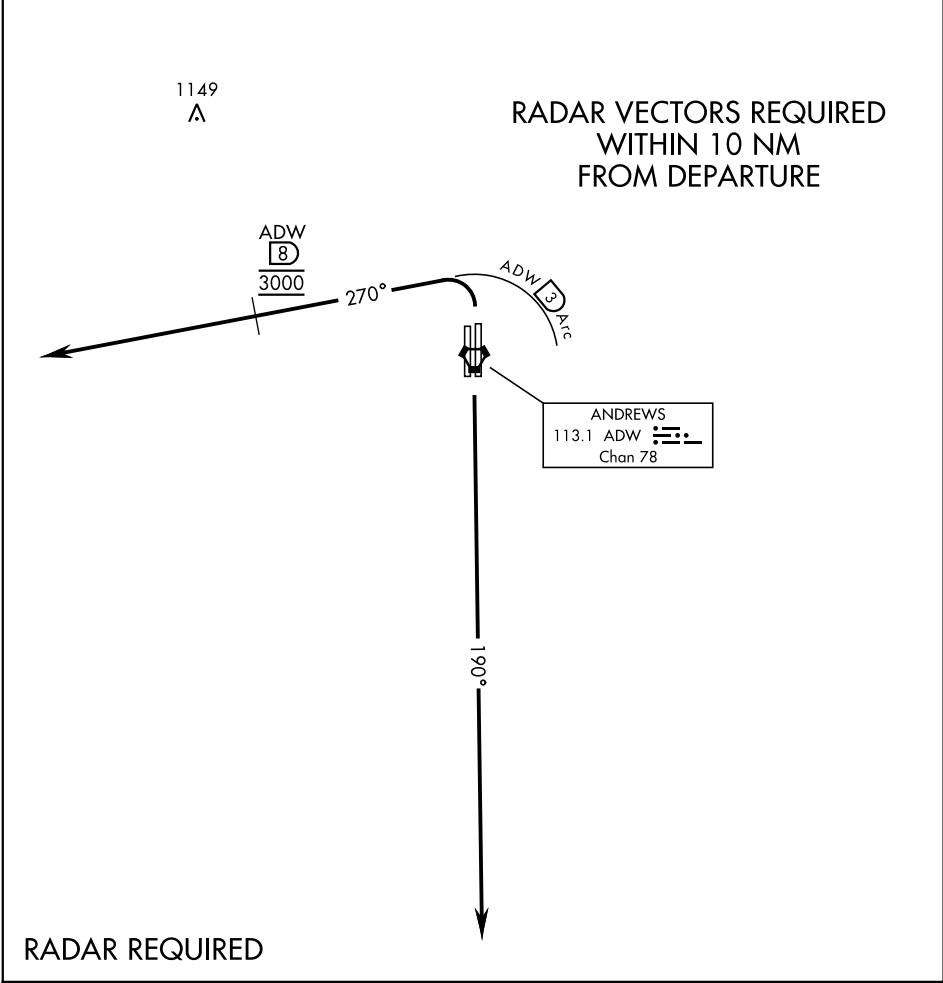

DEPARTURE ROUTE DESCRIPTION	
TAKE-OFF RWY 1L/1R: Turn left climb on heading 270° within 3 DME of ADW VORTAC, cross ADW 8 DME at 3000. Expect radar vectors.	
TAKE-OFF RWY 19R/19L: Climb on heading 190° to 3000. Expect radar vectors to the west.	