


SPRINGFIELD, MISSOURI

HI-TACAN RWY 20

VORTAC SGF 116.9 Chan 116	APCH CRS 196°	Rwy Idg 7003 TDZE 1262 Arpt Elev 1268	AL-604 [USAF]	SPRINGFIELD-BRANSON NATL (KSGF)	
When local altimeter setting not received, use Monett altimeter setting.			MALS (A4)	MISSED APPROACH: Climb to 3000 then right turn via SGF VORTAC R-206 to BILLIE INT/SGF 22 DME and hold.	
ATIS 135.125	APP CON 121.1 290.5	TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675	

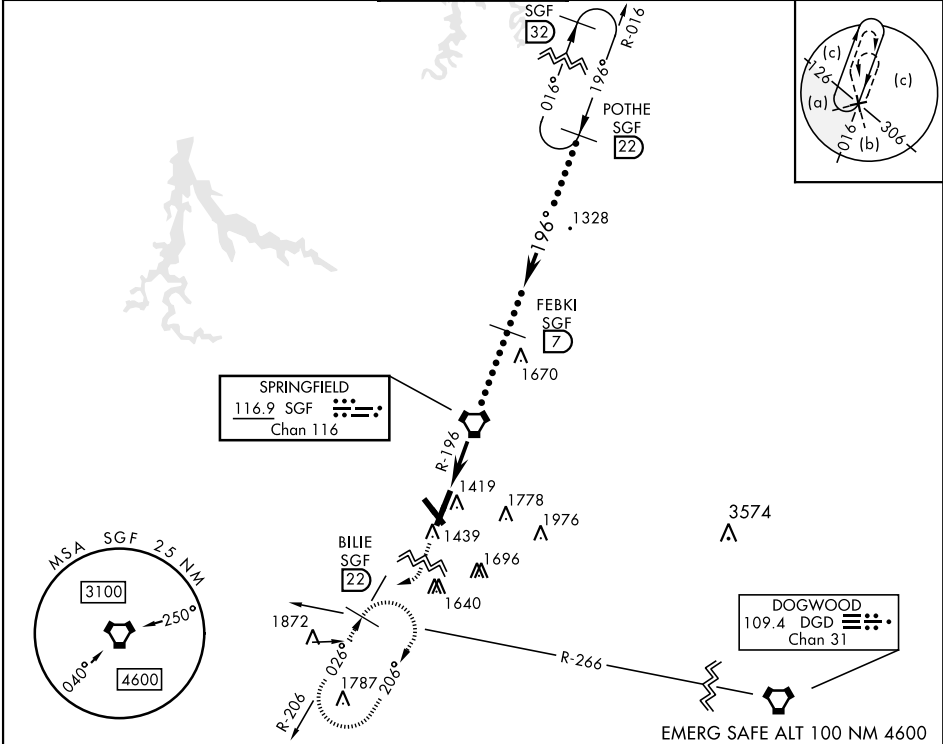

3000

↑

SGF

R-206

BILLIE

SGF

22

VDP NA when using Monett altimeter setting.

FEBKI

7

POTHE

22

15,000

R-196

6.5

5.1

196°

3400

3400

196°

3.02°

TCH 47

6.5 NM

CATEGORY	C	D	E
S-20	1760-1¼ 498 (500-1¼)	1760-1½ 498 (500-1½)	1760-1¾ 498 (500-1¾)
CIRCLING	1820-1½ 552 (600-1½)	1820-2 552 (600-2)	1920-2¼ 652 (700-2¼)

MONETT ALTIMETER SETTING MINIMUMS

	1860-1½	1860-1¾	1860-2
S-20	598 (600-1½)	598 (600-1¾)	598 (600-2)
CIRCLING	1920-1¾ 652 (700-1¾)	1920-2¾ 652 (700-2¾)	2020-2¾ 752 (800-2¾)

ELEV 1268

TDZE 1262

196° 6.5 NM from VORTAC

1309

1301

8000 X 1.50

7003 X 1.50

TWR 1361

REIL Rwy 32

HIRL Rwy 2-20 and 14-32

HI-TACAN RWY 20

NC-3, 16 MAY 2024 to 13 JUN 2024

NC-3, 16 MAY 2024 to 13 JUN 2024