

WAAS
CH **61105**
W03A

APP CRS
030°

Rwy Idg **6801**
TDZE **640**
Apt Elev **640**

RNAV (GPS) RWY 3

CHARLOTTESVILLE-ALBEMARLE (CHO)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
▲ When local altimeter setting not received, use Orange altimeter setting and increase LPV DA to 910, LNAV/VNAV DA to 985, and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D visibility ¼ SM and Circling Cats C/D visibility ¼ SM.
Baro-VNAV and VDP NA when using Orange altimeter setting. For Inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM. For Inop ALS when using Orange altimeter setting, increase LPV all Cats visibility to ¾ SM, and LNAV/VNAV all Cats visibility to 1 SM.

MALSR
AS

MISSED APPROACH:
Climb to 2000 then climbing right turn to 4000 direct GVE VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	--	---------------------------------	-------------------------

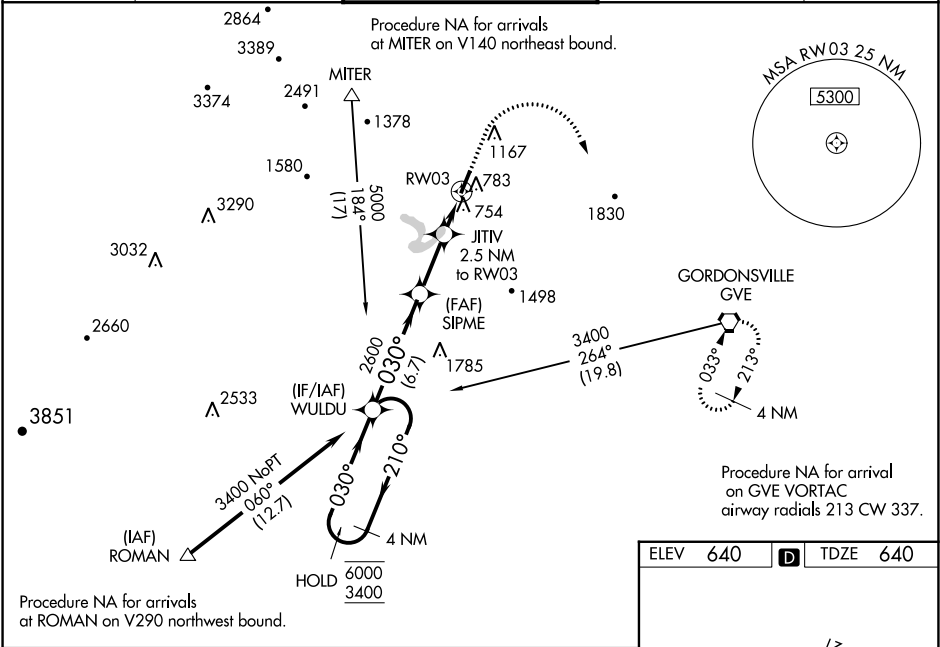

4 NM Holding Pattern

WULDU

SIPME

JIIV

RWY 03

2000

4000

GVE

GP 3.00° TCH 54

6000 ← 210°

3400 → 030°

030°

2600

*1480

6.7 NM

3.5 NM

1.5 NM

1 NM

*1 NM to RWY 03

RWY 03

*LNAV only

CATEGORY	A	B	C	D
LPV DA	840-½ 200 (200-½)			
LNAV/ VNAV DA	915-½ 275 (300-½)			
LNAV MDA	1020-½ 380 (400-½)		1020-⅝ 380 (400-⅝)	
CIRCLING	1100-1 460 (500-1)		1500-2½ 860 (900-2½) 1500-2¾ 860 (900-2¾)	

ELEV 640 D TDZE 640