

WAAS CH 82023 W10A	APP CRS 103°	Rwy Idg TDZE Apt Elev	5001 2502 2504
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 10

RALEIGH COUNTY MEML (BKW)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 28°C (82°F).
▲ DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Bluefield altimeter setting. When local altimeter not received, use Bluefield altimeter setting and increase all DA 118 feet and all MDA 120 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ½ SM, LNAV Cat C/D visibility ⅜ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 5700 direct
WIPGU and hold.

ASOS 121.55	CHARLESTON APP CON 125.4 269.125	UNICOM 123.0 (CTAF) 0
-----------------------	--	---------------------------------

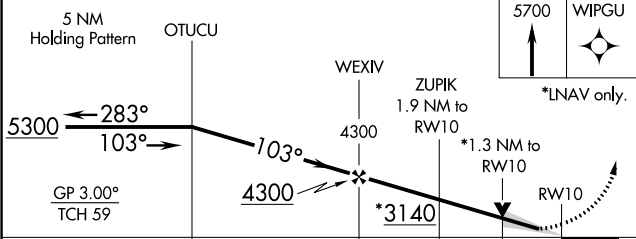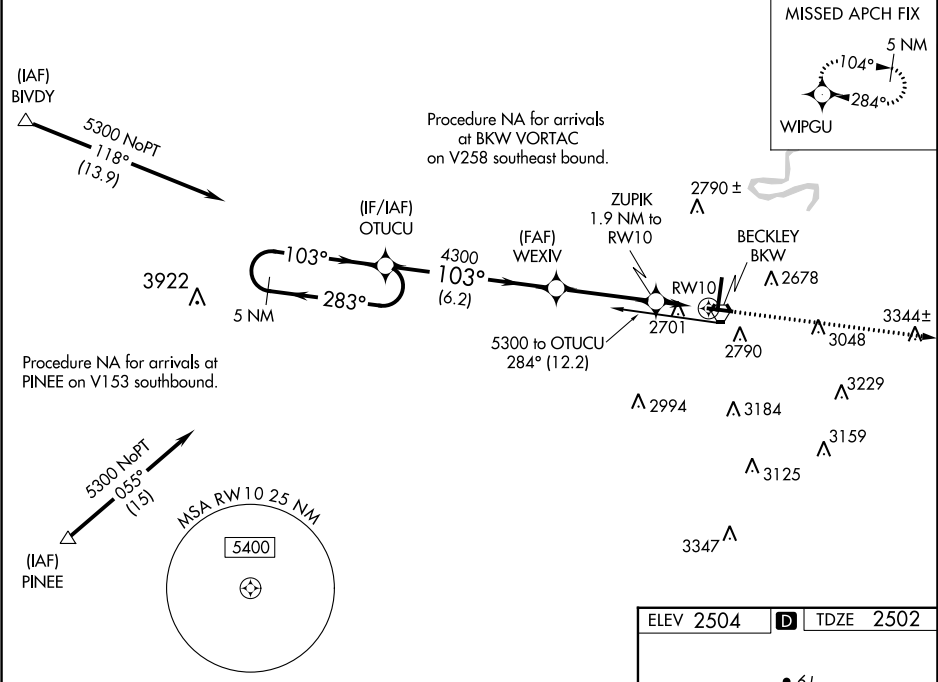

CATEGORY	A	B	C	D
LPV DA		2702-3/4	200 (200-3/4)	
LNAV/VNAV DA		3016-1 3/4	514 (500-1 3/4)	
LNAV MDA	2960-1	458 (500-1)	2960-1 3/8	458 (500-1 3/8)
CIRCLING	3120-1 616 (700-1)	3180-1 676 (700-1)	3320-2 1/2 816 (900-2 1/2)	3500-3 996 (1000-3)

