

VOR/DME PUW	APP CRS	Rwy Idg	7100
117.15	027°	TDZE	2567
Chan 118 (Y)		Apt Elev	2567

VOR RWY 5

PULLMAN/MOSCOW RGNL (PUW)

DME required.

Procedure NA at night.

Rwy 5 helicopter visibility reduction below 1 SM NA.



Inop table does not apply to S-5 and SODME fix minimums Cats A/B.

For inop ALS, increase S-5 SODME fix minimums Cat C/D visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climbing left turn to 6000 direct PUW VOR/DME and hold, continue climb-in-hold to 6000.

ASOS 135.675	SEATTLE CENTER 123.95 290.55	UNICOM 122.8 (CTAF) 0
-----------------	---------------------------------	--------------------------

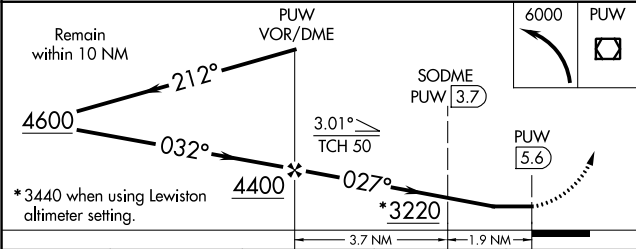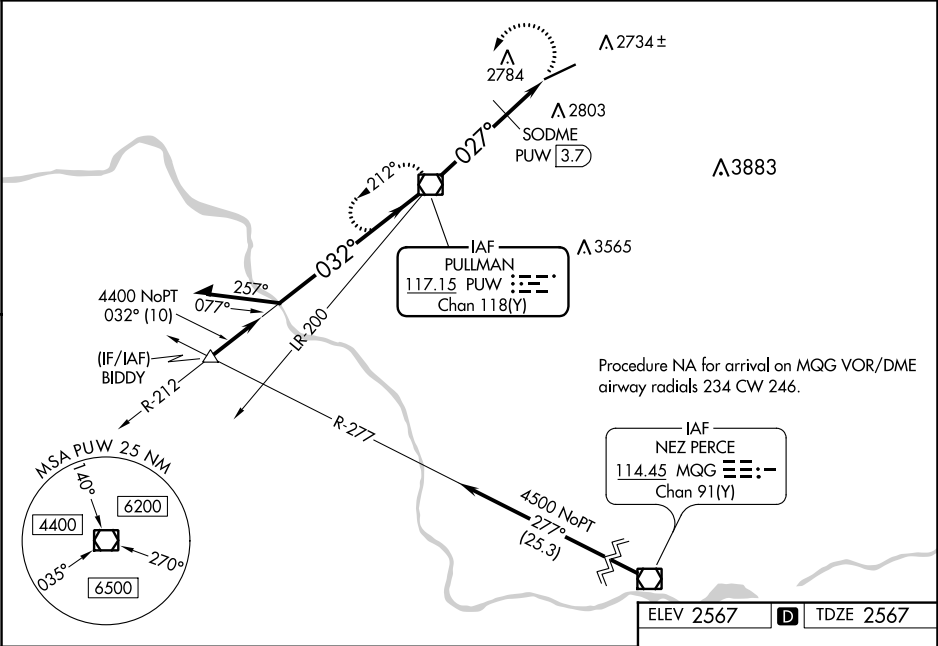

CATEGORY	A	B	C	D
S-5	3220/50	653 (700-1)	3220-1 3⁄8	653 (700-1 3⁄8)
CIRCLING	3220-1	653 (700-1)	3220-1 7⁄8	3420-2 3⁄4
			653 (700-1 3⁄8)	853 (900-2 3⁄4)
SODME FIX MINIMUMS				
S-5	3080/50	473 (500-1)		
CIRCLING	3080-1	3120-1	3140-1 1⁄2	3420-2 3⁄4
	513 (600-1)	553 (600-1)	573 (600-1 1⁄2)	853 (900-2 3⁄4)

ELEV 2567 D TDZE 2567

6000 PUW

2593

7100 X 150

027°

REIL Rwy 23 0

HIRL Rwy 5-23 0

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52