


WAAS CH 53504 W31A	APP CRS 311°	Rwy Idg 9200 TDZE 354 Apt Elev 365
--	------------------------	---


RNAV (GPS) RWY 31
EAST TEXAS RGNL (GGG)

RNP APCH - GPS. ▼ Baro-VNAV NA when using Gilmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. VDP NA when using Gilmer altimeter setting. When local altimeter setting not received, use Gilmer altimeter setting and increase all DA 59 feet, all MDA 60 feet. Increase all LPV and LNAV/VNAV visibilities ½ SM and Circling Cts C/D/E visibilities ¼ SM.	MISSED APPROACH: Climb to 2600 direct BOSME and hold.
--	--

ATIS 119.65	LONGVIEW APP CON* 124.675 257.975	EASTEX TOWER* 119.2 (CTAF) 0377.05	GND CON 121.6	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

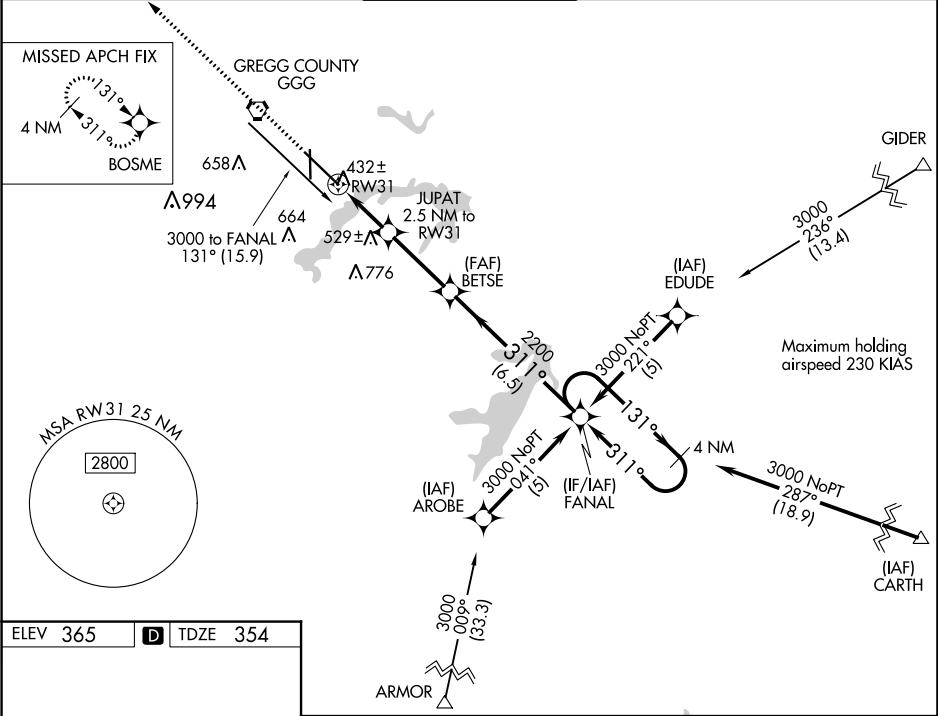

ELEV 365	D	TDZE 354
-----------------	----------	-----------------

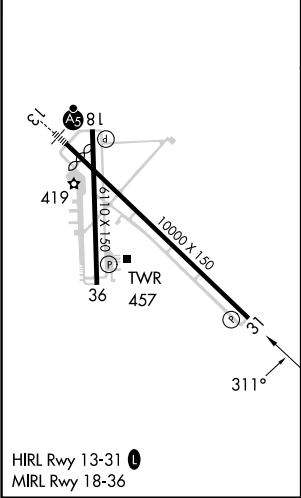

2600	BOSME	* LNAV only	JUPAT 2.5 NM to RW31	BETSE	FANAL	4 NM Holding Pattern
			* 1.2 NM to RW31	2200	311°	3000
			RW31	* 1200	2200	GP 3.00° TCH 50
			1.2	1.3	3.1 NM	6.5 NM
CATEGORY	A	B	C	D	E	
LPV DA	604-3/4 250 (300-3/4)					
LNAV/VNAV DA	682-1 328 (400-1 1/4)					
LNAV MDA	800-1	446 (500-1)	800-1 1/4 446 (500-1 1/4)	800-1 1/2 446 (500-1 1/2)		
CIRCLING	860-1	495 (500-1)	980-1 3/4 614 (700-1 3/4)	1080-2 1/4 714 (800-2 1/4)	1080-2 1/2 715 (800-2 1/2)	