

APP CRS
100°

Rwy ldg
TDZE
201

Apt Elev
201

RNAV (GPS) RWY 10

LAKE CITY GATEWAY (LCQ)

RNP APCH-GPS.

When local altimeter setting not received, use Gainesville altimeter setting: Increase all MDAs 100 feet; increase LNAV Cat C/D visibility 3⁄8 SM and Circling Cat C visibility 1⁄2 SM and Cat D 1⁄4 SM. Procedure NA at night. Rwy 10 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct DREBL and hold.


AWOS-3
120,675

JACKSONVILLE CENTER
125,375 254,325

LAKE CITY TOWER ★
119.2 (CTAF) 0 314.6

GND CON
121.9

UNICOM
122.95

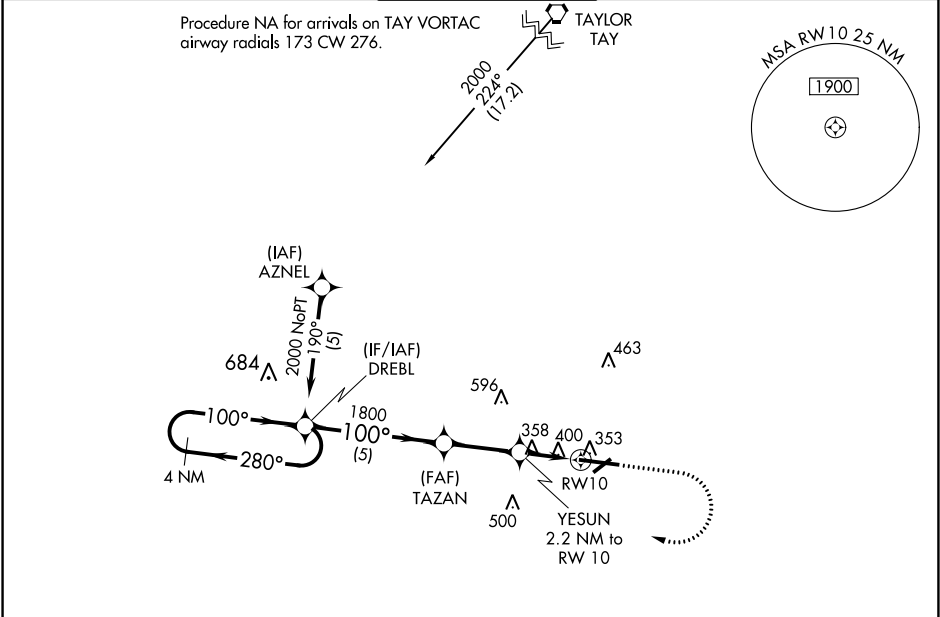

ELEV 201

TDZE 201

4 NM Holding Pattern

DREBL

2000

280°

100°

100°

1800

2.96°

TCH 53

YESUN
2.2 NM to RW 10

940

RW 10

5 NM

2.7 NM

2.2 NM

800

2000

DREBL

100°

TWR

8003 X 150

4000 X 75

28

CATEGORY	A	B	C	D
LNAV MDA	700-1	499 (500-1)	700-1 ^{3⁄8}	499 (500-1 ^{3⁄8})
CIRCLING	760-1	559 (600-1)	780-1 ^{1⁄2} 579 (600-1 ^{1⁄2})	960-2 ^{1⁄2} 759 (800-2 ^{1⁄2})

REIL Rwy 10 and 28 0
MIRL Rwy 5-23 and 10-28 0