

WAAS CH 87115 W05A	APP CRS 053°	Rwy Idg TDZE Apt Elev 6215 947 947
--	------------------------	--


RNAV (GPS) Y RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

RNP APCH.
For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct ENIVY and hold.

ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6	CLNC DEL 118.55
----------------------	--	--	-------------------------------	---------------------------

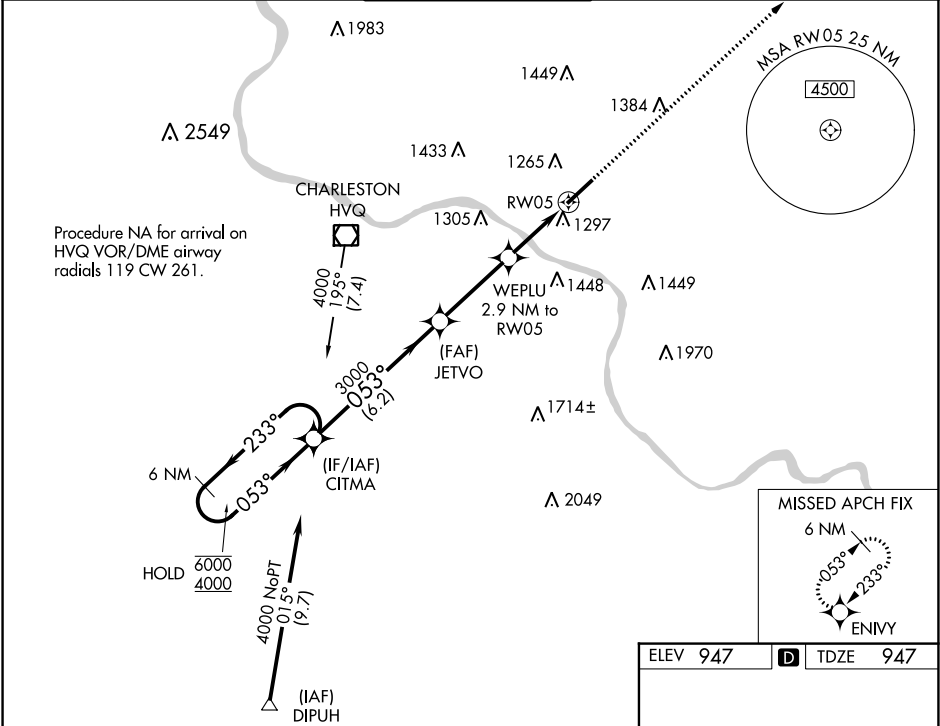

6 NM Holding Pattern CITMA

6000 ← 233°
4000 → 053°

GP 3.00°
TCH 56

3000

JETVO 3000

WEPLU 2.9 NM to RW05

* 1.7 NM to RW05

RW05

6.2 NM 3.4 NM 1.2 NM 1.7 NM

3000 ENIVY

* LNAV only

CATEGORY	A	B	C	D
LPV DA	1147/40		200 (200-¾)	
LNAV/VNAV DA	1584-1¾		637 (700-1¾)	
LNAV MDA	1560/55	613 (700-1)	1560-1¾	613 (700-1¾)
CIRCLING	1600-1	653 (700-1)	1760-2½ 813 (900-2½)	1880-3 933 (1000-3)

ELEV 947 D TDZE 947

6 NM 053° 233° ENIVY

671.5 X 150

0.8% UP

TWR 1037

053°

HIRL Rwy 5-23
REIL Rwy 5