

WAAS
CH **70303**
W05A

APP CRS
045°

Rwy Idg **5601**
TDZE **205**
Apt Elev **221**

RNAV (GPS) RWY 5

MASSENA INTL-RICHARDS FLD (MSS)

RNP APCH- GPS.


▼

▲

Circling Rwy 9, 23, 27 NA at night.
For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct
HODSA and on track 135° to HINED and hold.

ASOS 128.075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

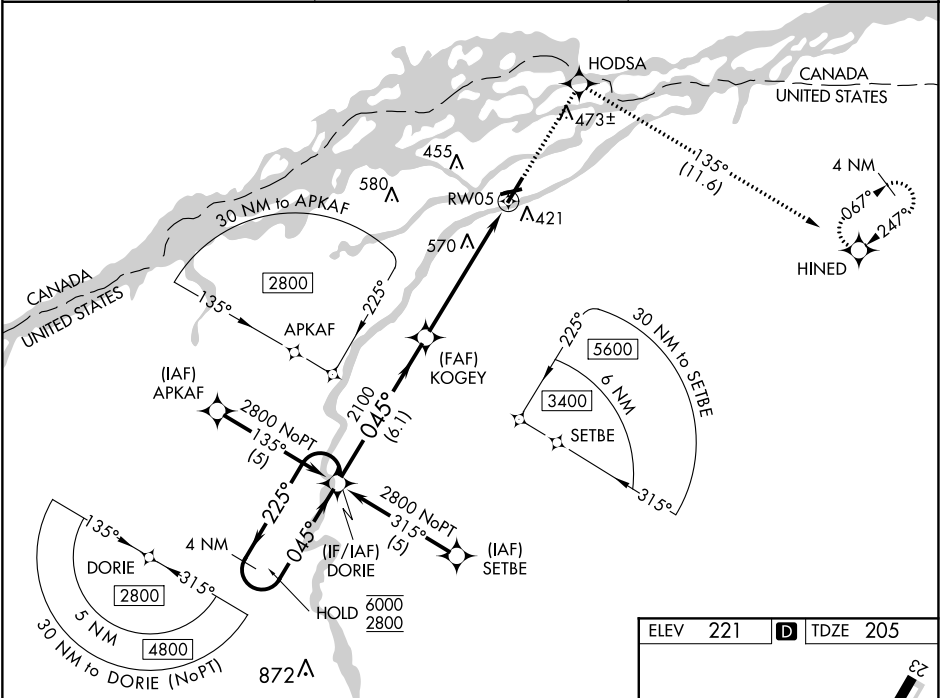

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 58).

4 NM Holding Pattern

DORIE

6000' MSL, 2800' MSL, 225° bearing, 045° bearing

GP 3.00° TCH 54

KOGEY

2100' MSL, 045° bearing, 2100' MSL

HODSA

3000' MSL, 135° bearing

HINED

045° bearing, 1.9 NM to RW05

*LNAV only

*1.9 NM to RW05

RW05

6.1 NM, 3.8 NM, 1.9 NM

CATEGORY	A	B	C	D
LPV DA		455-3 ³ / ₄	250 (300-3 ³ / ₄)	
LNAV/VNAV DA		968-2 ¹ / ₂	763 (800-2 ¹ / ₂)	
LNAV MDA	860-1	655 (700-1)	860-1 ⁷ / ₈	655 (700-1 ⁷ / ₈)
CIRCLING	860-1	639 (700-1)	880-1 ⁷ / ₈	900-2 ¹ / ₄
			659 (700-1 ⁷ / ₈)	679 (700-2 ¹ / ₄)

REIL Rwy 5, 9 and 27 0

HIRL Rwy 5-23 0

MIRL Rwy 9-27 0