

WAAS CH 69217 W04A	APP CRS 044°	Rwy Idg TDZE Apt Elev	7701 889 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4



CHIPPEWA VALLEY RGNL (EAU)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ¾ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

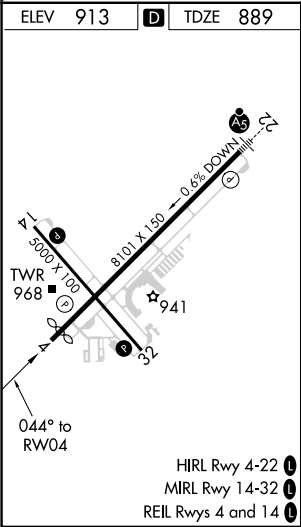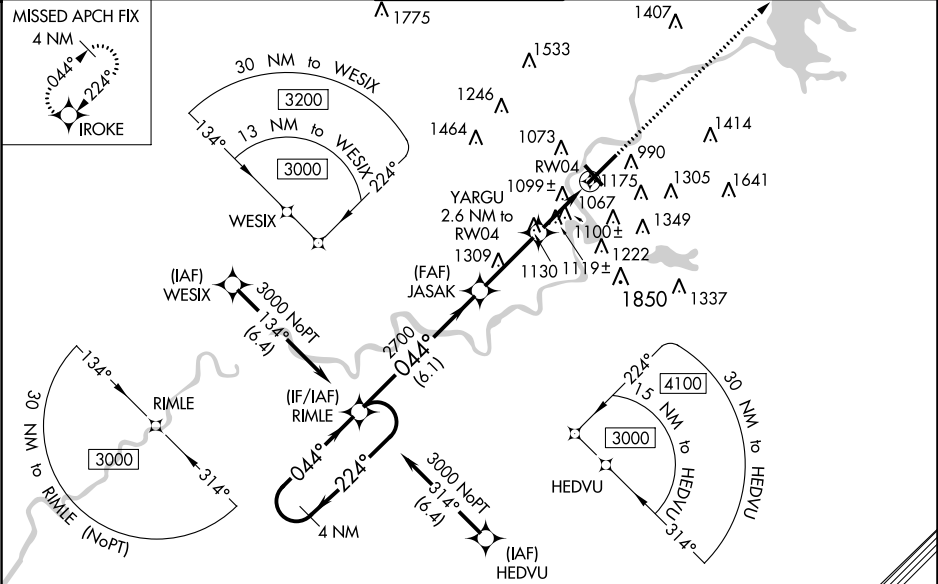

4 NM Holding Pattern 3000 GP 3.00° TCH 44 RIMLE JASAK YARGU 2.6 NM to RW04 *1.3 NM to RW04 RW04 224° 044° 044° 2700 *1740 6.1 NM 3 NM 1.3 NM 1.3 NM FALLS 1 MOA 3000 IROKE *LNAV only				
CATEGORY	A	B	C	D
LPV DA	1089-3⁄4 200 (200-3⁄4)			
LNAV/VNAV DA	1379-15⁄8 490 (500-1%)			
LNAV MDA	1360-1 471 (500-1)	1360-15⁄8 471 (500-1%)		
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-21⁄4 747 (800-21⁄4)	2200-3 1287 (1300-3)