


WAAS CH 42805 W05A	APP CRS 051°	Rwy Idg TDZE 136 Apt Elev 142
--	------------------------	---

RNAV (GPS) RWY 5
LAKELAND LINDER INTL (LAL)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Plant City altimeter setting: increase LPV DA to 354 feet; increase LNAV/VNAV DA to 523 feet; increase all MDA 20 feet and LNAV Cat C/D visibility 1/8 SM. Baro-VNAV and VDP NA when using Plant City altimeter setting. Circling NA to Rwy 8, 26.	MISSED APPROACH: Climb to 2000 direct OBTOQ and left turn on track 313° to PLUMY and hold.
--	--

ATIS 118.025	TAMPA APP CON 120.65 290.3	LAKELAND TOWER 124.5 236.775	GND CON 121.4
------------------------	--------------------------------------	--	-------------------------

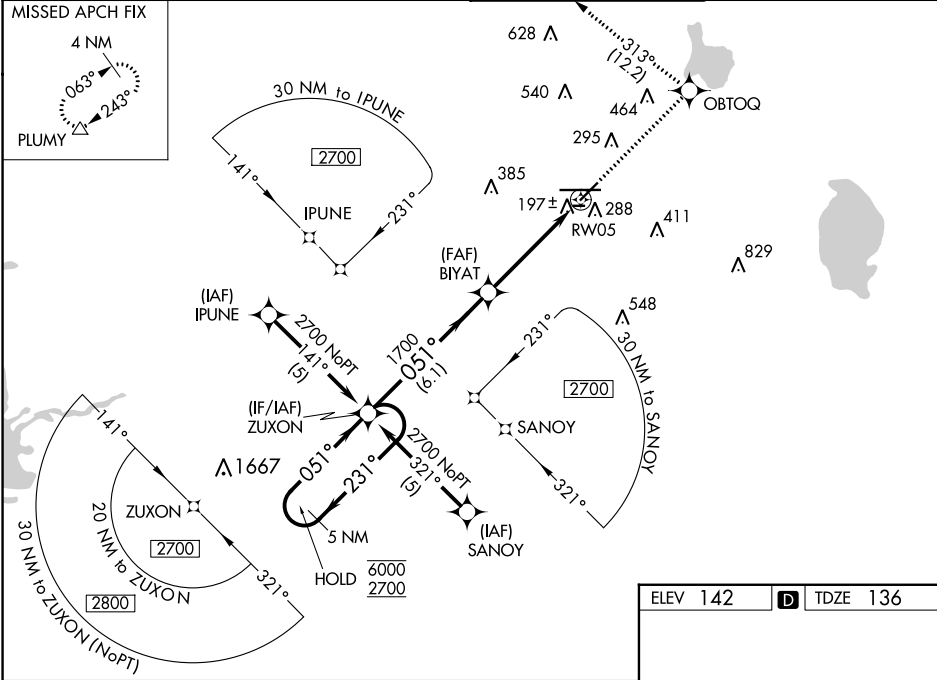

5 NM Holding Pattern

6000

2700

← 231°

→ 051°

GP 3.00° TCH 56

ZUXON

BIYAT

1700

1.2 NM to RW05

RW05

6.1 NM

3.5 NM

1.2 NM

2000

OBTOQ

tr 313°

PLUMY

LPV DA

336-3/4 200 (200-3/4)

LNAV/VNAV DA

505-1 1/4 369 (400-1 1/4)

LNAV MDA

560-1 424 (500-1) 560-1 1/4 424 (500-1 1/4)

CIRCLING

600-1 458 (500-1) 660-1 518 (600-1) 720-1 1/2 578 (600-1 1/2) 840-2 1/4 698 (700-2 1/4)

TDZ/CL Rwy 10

HIRL Rws 5-23 and 10-28

TWR 285

5500 X 150

5000 X 150

2208 X 60

051°

SE-3, 16 MAY 2024 to 13 JUN 2024

SE-3, 16 MAY 2024 to 13 JUN 2024