

VOR or TACAN RWY 22L

VORTAC SLI 115.7 Chan 104	APCH CRS 214°	Rwy Idg TDZE Arpt Elev 8001 35 35
---------------------------------	------------------	--




AL-953 [USA]

LOS ALAMITOS AAF (KSLI)


DME required.	SALSF A2	MISSED APPROACH: Climb to 1800, then climbing left turn to 3000 via SLI VORTAC R-058 to AHEIM INT and hold.
* When ALS inop, increase vis CAT D ¼ mile. ** Circling not authorized N of Rwy 4L-22R.		

ATIS ★ 118.875 379.975	SOCAL APP CON 125.35 316.125	TOWER★ 123.85 251.15	GND CON 126.95 257.95	ASR/ PAR
---------------------------	---------------------------------	-------------------------	--------------------------	-------------

When Los Alamitos altimeter setting not available, use Santa Ana altimeter setting.

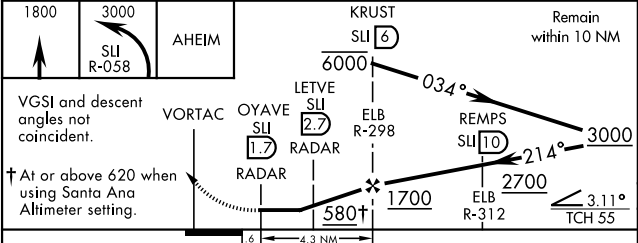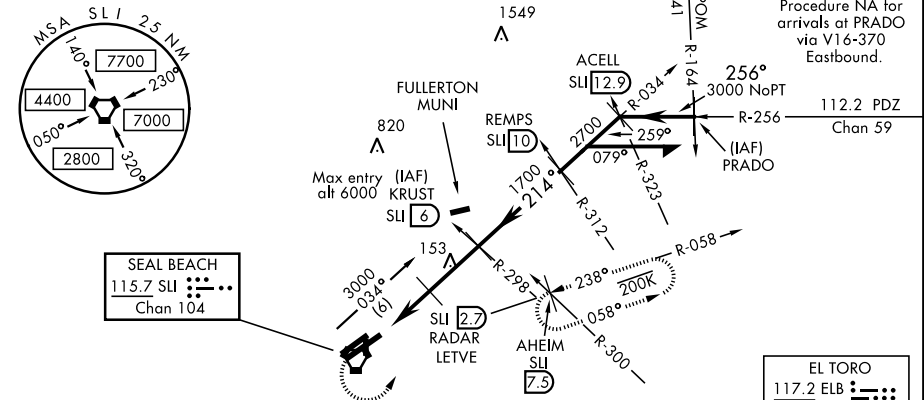

CATEGORY	A	B	C	D
S-22L *	440-¾ 405 (500-¾)		440-1 405 (500-1)	440-1¼ 405 (500-1¼)
CIRCLING **	440-1 405 (500-1)	500-1 465 (500-1)	500-1½ 465 (500-1½)	600-2 565 (600-2)
WITHOUT DME or RADAR				
S-22L	580-¾ 545 (600-¾)		580-1¼ 545 (600-1¼)	580-1½ 545 (600-1½)
CIRCLING **	580-1 545 (600-1)		580-1½ 545 (600-1½)	600-2 565 (600-2)
SANTA ANA ALTIMETER SETTING MINIMUMS				
S-22L *	480-¾ 445 (500-¾)		480-1 445 (500-1)	480-1½ 445 (500-1½)
CIRCLING **	480-1 445 (500-1)	540-1 505 (600-1)	540-1½ 505 (600-1½)	640-2 605 (700-2)
SANTA ANA ALTIMETER SETTING WITHOUT DME or RADAR				
S-22L	620-¾ 585 (600-¾)		620-1¼ 585 (600-1¼)	620-1½ 585 (600-1½)
CIRCLING **	620-1 585 (600-1)		620-1½ 585 (600-1½)	640-2 605 (700-2)

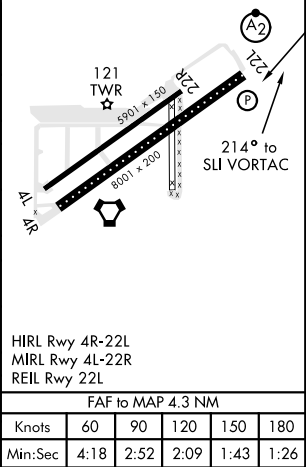

VOR or TACAN RWY 22L

SW-3, 16 MAY 2024 to 13 JUN 2024

SW-3, 16 MAY 2024 to 13 JUN 2024