


WAAS CH 42720 W01A	APP CRS 008°	Rwy Idg TDZE 729 Apt Elev 742	8199
--	------------------------	---	-------------

RNAV (GPS) RWY 1

CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.		MALSR		MISSED APPROACH: Climb to 2500 direct WAGET and hold.	
 ASR	For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 127.6	ROCKFORD APP CON 121.0 327.0		ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375	CLNC DEL 119.25

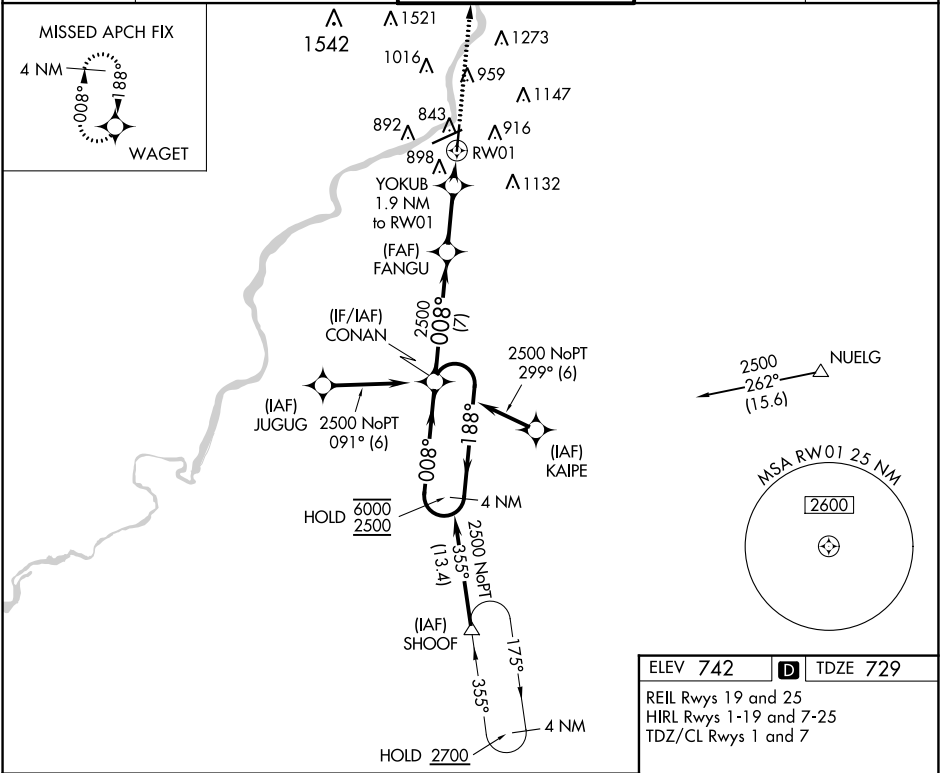

4 NM Holding Pattern	CONAN	FANGU	YOKUB	WAGET
6000	188°	2500	1.9 NM to RW01	2500
2500	008°	2500	1.1 NM to RW01	
GP 3.00°		1340		
TCH 50				
	7 NM	3.6 NM	0.8	1.1
CATEGORY	A	B	C	D
LPV DA*		929/24	200 (200-½)	
LNAV/VNAV DA		1200/60	471 (500-1¼)	
LNAV MDA	1120/24	391 (400-½)	1120/35	391 (400-¾)
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

61

0.3% DOWN

10002 X 150

0.6% UP

8200 X 150

TWR

770

798

008°