


WAAS CH 40435 W19A	APP CRS 188°	Rwy Idg 8099 TDZE 736 Apt Elev 742
--	------------------------	--


RNAV (GPS) RWY 19

CHICAGO/ROCKFORD INTL (RFD)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2500 direct CONAN and hold.
 ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.			
	ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	

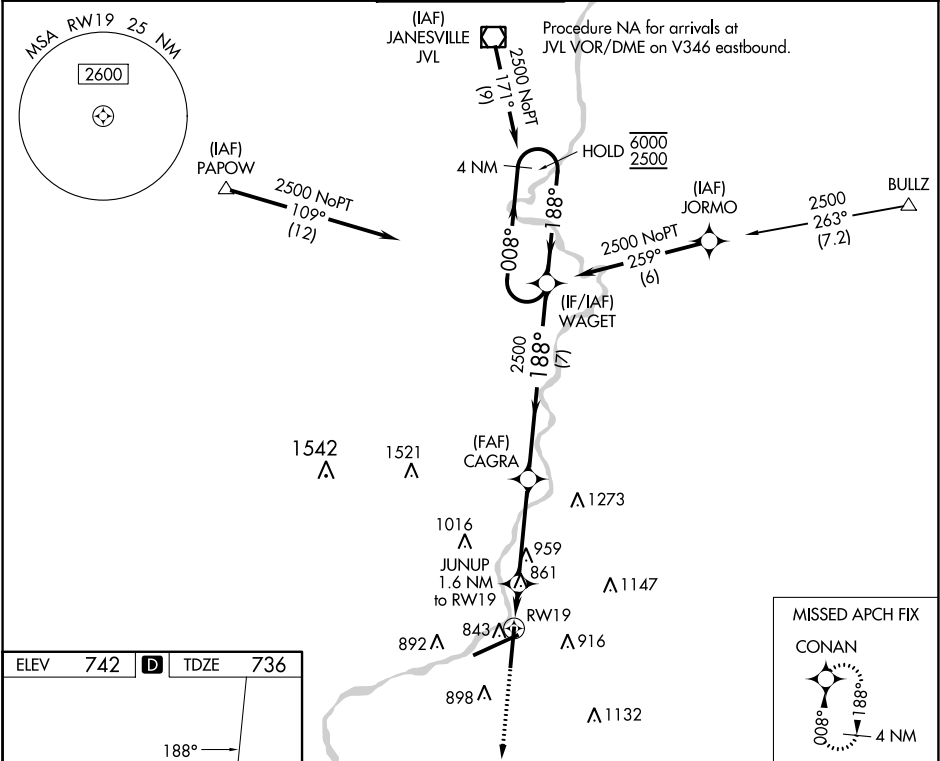

ELEV 742	D	TDZE 736
----------	----------	----------

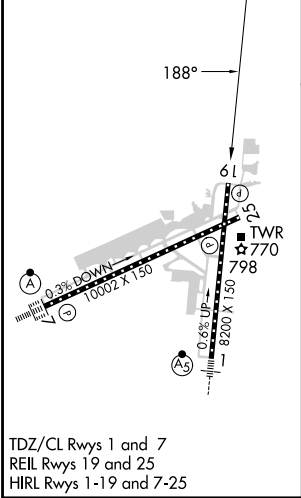

2500 CONAN		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		4 NM Holding Pattern	
JUNUP 1.6 NM to RW19		CAGRA 2500		WAGET	
1 NM to RW19		1280		188° 008° 6000 2500	
1 NM		0.6 NM		3.8 NM	
7 NM		GP 3.00°		TCH 50	
CATEGORY	A	B	C	D	
LPV DA	936-3/4		200 (200-3/4)		
LNAV/VNAV DA	1039-7/8		303 (300-7/8)		
LNAV MDA	1120-1	384 (400-1)	1120-1 1/2	384 (400-1 1/2)	
C CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1 1/2 578 (600-1 1/2)	1460-2 1/4 718 (800-2 1/4)	