

WAAS CH 40128 W25A	APP CRS 249°	Rwy Idg 10002 TDZE 736 Apt Elev 742
--	------------------------	--


RNAV (GPS) RWY 25
CHICAGO/ROCKFORD INTL (RFD)

RNP APCH.


ASR Rwy 25 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 39°C.

MISSED APPROACH:
Climb to 2500 direct
RUDGE and hold.

ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375	CLNC DEL 119.25
---------------	---------------------------------	---------------------------------	--------------------------	--------------------

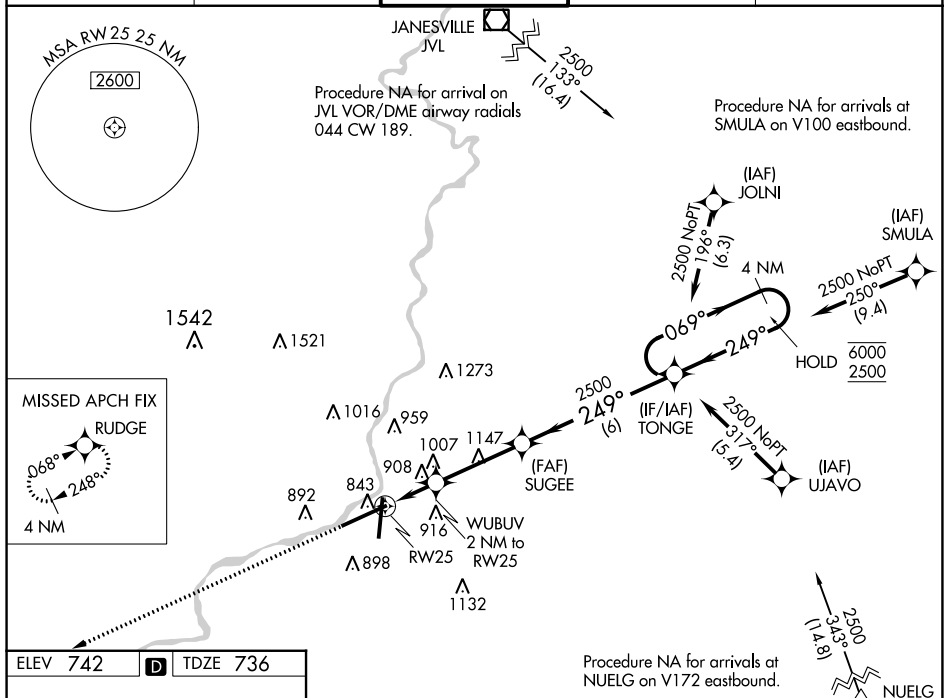

249°



REIL Rwy 19 and 25
HIRL Rwy 1-19 and 7-25
TDZ/CL Rwy 1 and 7

2500
↑
RUDGE

VGSJ and RNAV glidepath not coincident
(VGSJ Angle 3.00/TCH 75).

4 NM Holding Pattern

SUGEE
2500

TONGE

* LNAV only.

WUBUV
2 NM to
RW25

*1.1 NM
to RW25

RW25

*1400

2500

069° → 6000
← 2500

GP 3.00°
TCH 50

1.1 NM 0.9 3.4 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	986/50		250 (300-1)	
RNAV/VNAV DA	1191-1 ³ / ₈		455 (500-1 ³ / ₈)	
RNAV MDA	1160/55		424 (500-1)	
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1 ¹ / ₂ 578 (600-1 ¹ / ₂)	1460-2 ¹ / ₄ 718 (800-2 ¹ / ₄)

CHICAGO/ROCKFORD INTL (RFD)
RNAV (GPS) RWY 25