

RNAV (GPS) RWY 29

APCH CRS	Rwy Idg	8000
285°	TDZE	285
	Arpt Elev	322

AL-2440 [USN]

GOLIAD NOLF (KNGT)


RNP APCH

When local altimeter setting not received, use Beeville Muni altimeter setting.


MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

ASOS
353.675


CTAF
132.875 307.075

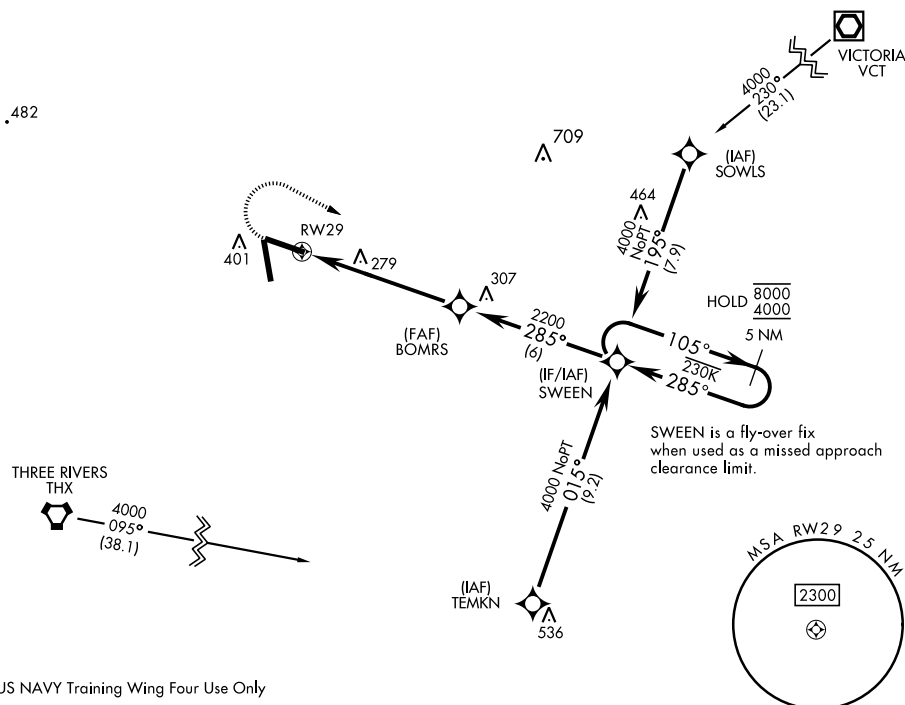

US NAVY Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11,100

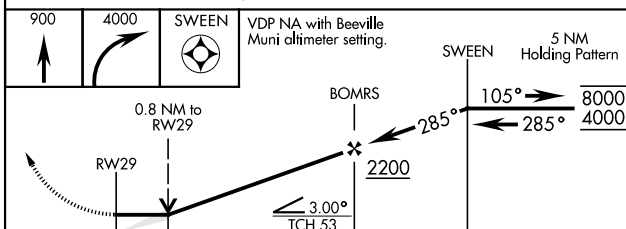

	5.9 NM			
CATEGORY	A	B	C	D
INAV MDA	580-1 295 (300-1)			
C CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)
BEEVUE MUNI ALTIMETER SETTING MINIMA				
INAV MDA	640-1 355 (400-1)			
C CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)

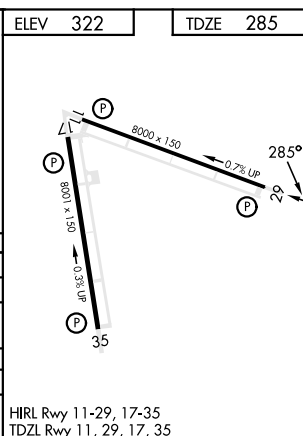

BERCLAIR, TEXAS

28°37'N-97°37'W

GOLIAD NOLF (KNGT)

Amdt 3 05OCT23

RNAV (GPS) RWY 29

SC-3, 16 MAY 2024 to 13 JUN 2024