

WAAS CH 40330 W28A	APP CRS 285°	Rwy Idg 5018 TDZE 50 Apt Elev 52
--	------------------------	---

RNAV (GPS) RWY 28L
HAYWARD EXEC(HWD)



HAYWARD EXEC(HWD)

RNP APCH.

T Baro-VNAV NA. When local altimeter setting not received, use Oakland altimeter setting:
A increase all DA/MDA 20 feet, and LNAV/VNAV all Cats and LNAV Cat C/D visibility $\frac{1}{8}$ SM and Circling Cat D visibility $\frac{1}{4}$ SM. Circling NA north of Rwy 10L-28R. Rwy 28L: Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2100 direct OAK VOR/DME and hold.

ATIS 126.7	NORCAL APP CON 124.4 351.8	HAYWARD TOWER ★ 120.2 (CTAF) 0 257.8	GND CON 121.4	CLNC DEL 128.05	UNICOM 122.95
---------------	-------------------------------	---	------------------	--------------------	------------------

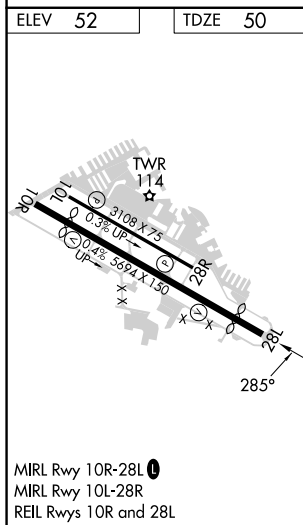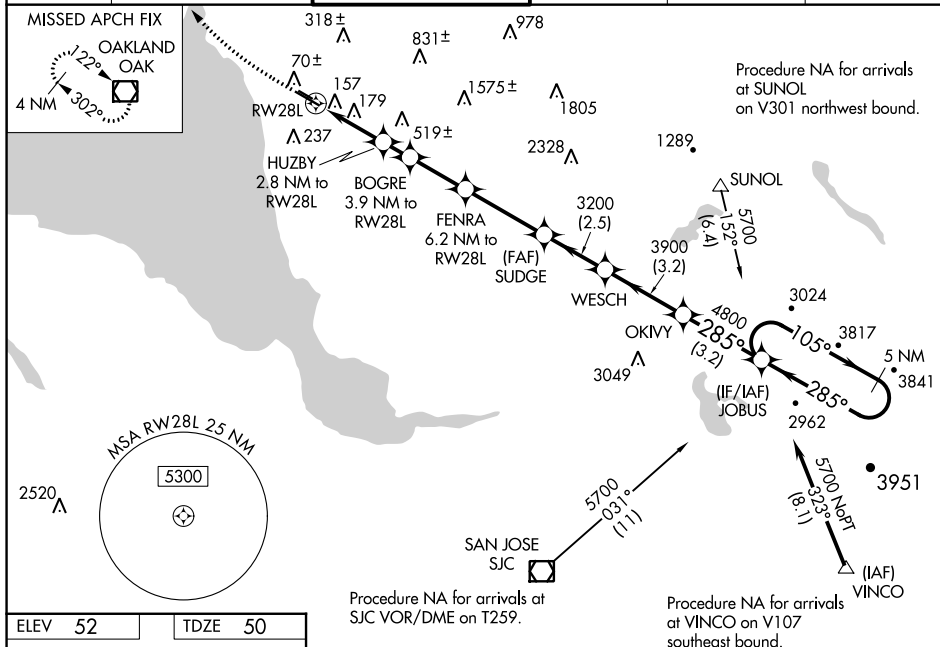

RNAV (GPS) RWY 28L