
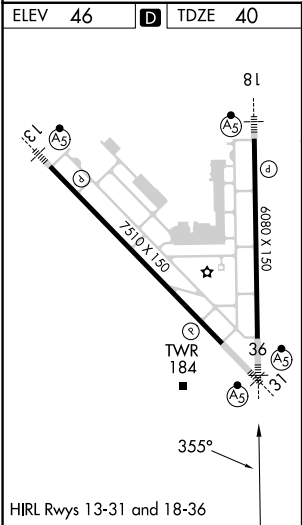


LOC/DME I-OYC 109.5 Chan 32	APP CRS 355°	Rwy Idg 6080 TDZE 40 Apt Elev 46	ILS or LOC RWY 36 CORPUS CHRISTI INTL (CRP)
---	------------------------	---	--

DME required. ▼ For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500.	MALSR 	MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold.
--	-----------	--

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

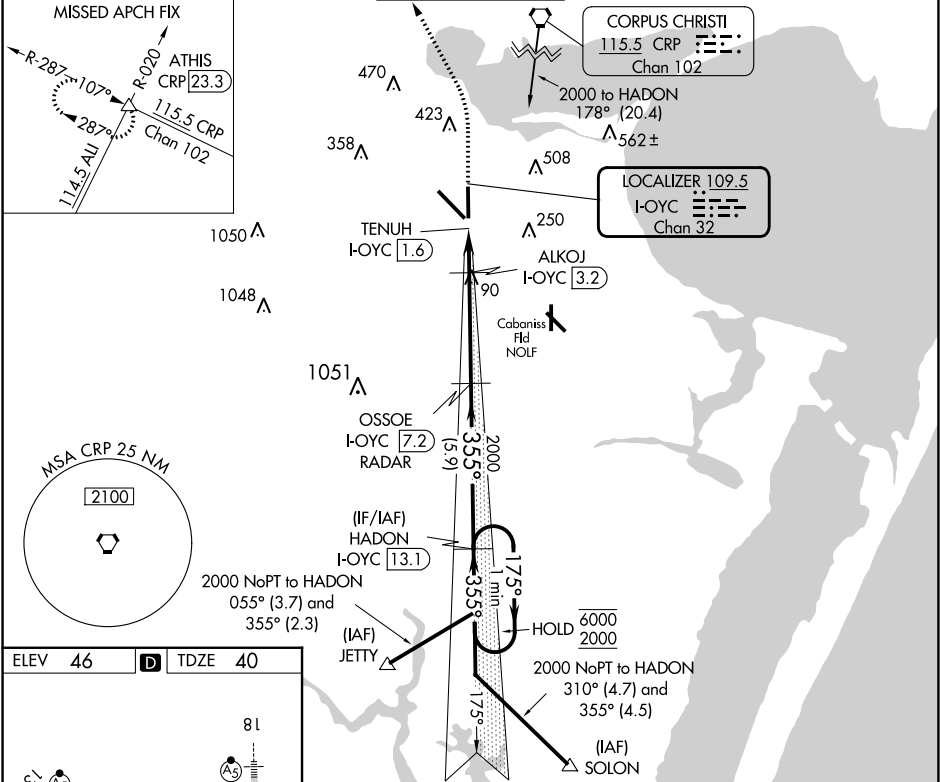

700 ↑	2000 hdg 338°	CRP R-287	ATHIS △	ILS unusable inside DA. LOC unusable within 1.6 DME.										
				OSOE I-OYC [7.2] RADAR		HADON I-OYC [13.1]		One Minute Holding Pattern						
GS 3.00° TCH 53														
0.4 1.6 NM 4 NM 5.9 NM														
CATEGORY		A		B		C		D		E				
S-ILS 36				240/24		200 (200-½)								
S-LOC 36				340/24		300 (300-½)								
CIRCLING		500-1 454 (500-1)		780-1 734 (800-1)		820-2¼ 774 (800-2¼)		820-2½ 774 (800-2½)		820-2¾ 774 (800-2¾)				

SC-3, 18 APR 2024 to 16 MAY 2024

SC-3, 18 APR 2024 to 16 MAY 2024