

WAAS
CH **40301**
W35A


APP CRS
348°

Rwy Idg **8002**
TDZE **21**
Apt Elev **24**

RNAV (GPS) RWY 35

ACADIANA RGNL (A.R.A.)

RNP APCH.				MALSR	MISSED APPROACH: Climb to 440 then climbing right turn to 2000 direct LULEW and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwys 17W and 35W.							
ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM	★
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7

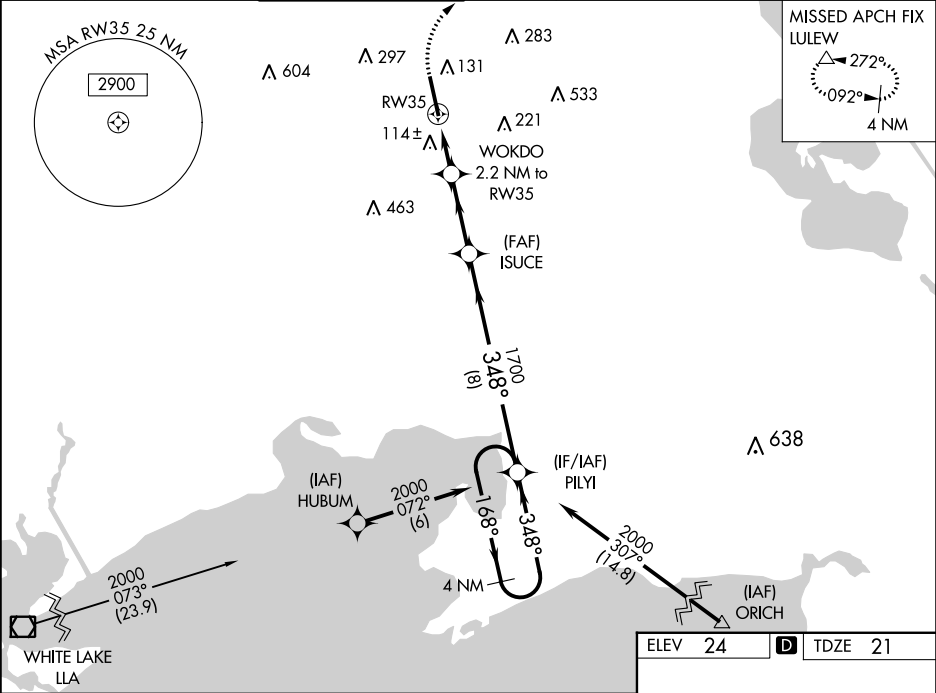

440 2000 LULEW		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).		4 NM Holding Pattern
*LNAV only.				
CATEGORY		A	B	D
LPV DA		221-1½	200 (200-½)	
LNAV/ VNAV DA		303-½	282 (300-½)	
LNAV MDA		380-½ 359 (400-½)	380-¾ 359 (400-¾)	
CIRCLING		440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½) 680-2 656 (700-2)

