

WAAS
CH **86227**
W24A

APP CRS
238°

Rwy Idg
TDZE **6201**
2087
Apt Elev **2105**

RNAV (GPS) RWY 24

NEW RIVER VALLEY (PSK)

RNP APCH.


▼

Baro-VNAV NA when using Blacksburg altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 45°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ SM. Circling NA for Cat D northwest of Rwy 6-24.

MISSED APPROACH:

Climb to 5000 direct GUNTO and hold.

AWOS-3 127.375	ROANOKE APP CON 126.0 339.8	ROANOKE CLNC DEL 121.7	UNICOM 122.7 (CTAF)
--------------------------	---------------------------------------	----------------------------------	-------------------------------

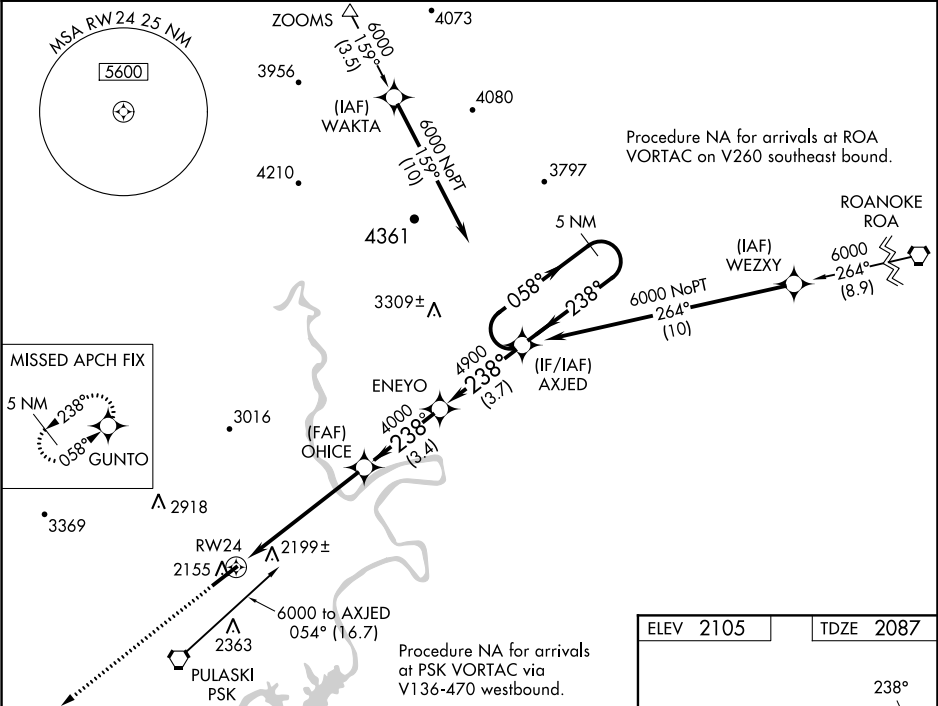

5000

GUNTO

OHICE 4000

ENEYO 4900

AXJED 6000

5 NM Holding Pattern

RW24

5.8 NM

3.4 NM

3.7 NM

GP 3.00° TCH 44

CATEGORY	A	B	C	D
LPV DA	2337-1 250 (300-1)			
LNAV/VNAV DA	2502-1½ 415 (400-1½)			
LNAV MDA	2460-1 373 (400-1)		2460-1¼ 373 (400-1¼)	
CIRCLING	2620-1 515 (600-1)	2680-1 575 (600-1)	2780-2 675 (700-2)	2780-2¼ 675 (700-2¼)

ELEV 2105

TDZE 2087

238°

2174±

0.5% UP

2113±

2166±

2268

6201 X 150

HIRL Rwy 6-24

REIL Rwy 24