

VOR/DME SWO 108.4 Chan 21	APP CRS 178°	Rwy Idg 7401 TDZE 1000 Apt Elev 1000	VOR RWY 17 STILLWATER RGNL (SWO)
---	------------------------	---	-------------------------------------

⚠



When local alimter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet and Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting. For inop MALSR increase S-17 Cats A/B visibility to 1 mile. Helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH:

Climbing right turn to 2600
direct SWO VOR/DME
and hold.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF)	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

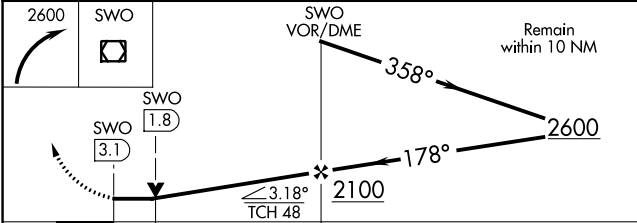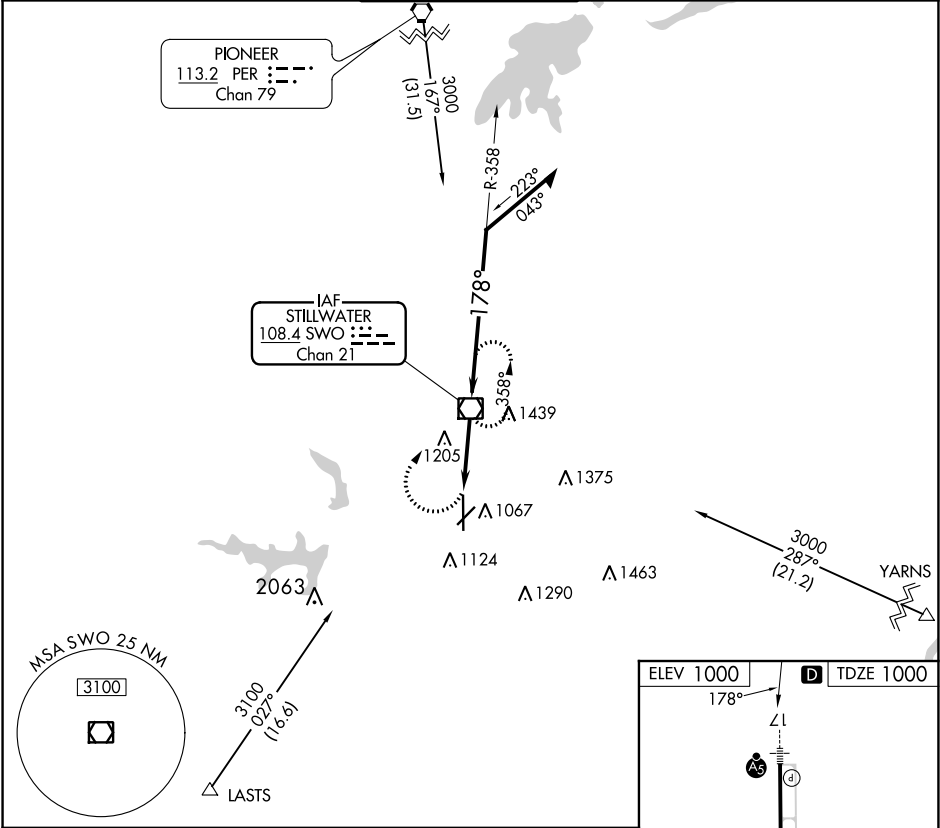

	1.3	1.8 NM				35	
CATEGORY	A		B	C	D		REIL Rwy 35
S-17	1460-3/4		460 (500-3/4)	1460-1 460 (500-1)		MIRL Rwys 4-22 and 17-35	
CIRCLING	1460-1		460 (500-1)	1520-1 1/2 520 (600-1 1/2)	1740-2 1/4 740 (800-2 1/4)	FAF to MAP 3.1 NM	
						Knots	60 90 120 150 180
						Min:Sec	3:06 2:04 1:33 1:14 1:02

SC-1, 16 MAY 2024 to 13 JUN 2024

SC-1, 16 MAY 2024 to 13 JUN 2024