

WAAS CH 82018 W05A	APP CRS 050°	Rwy Idg TDZE 1224 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 5


BRainerd Lakes RGNL (BRD)

⚠

Baro-VNAV NA when using Aiklin altimeter setting. DME/DME RNP-0.3 NA. Procedure NA when R-4301 is active. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Aiklin altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats, and LNAV Cats C and D visibility ¼ mile. VDP NA with Aiklin altimeter setting.

MISSED APPROACH: Climb to 3000 direct EYUPO and hold.

ASOS 126.775	MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

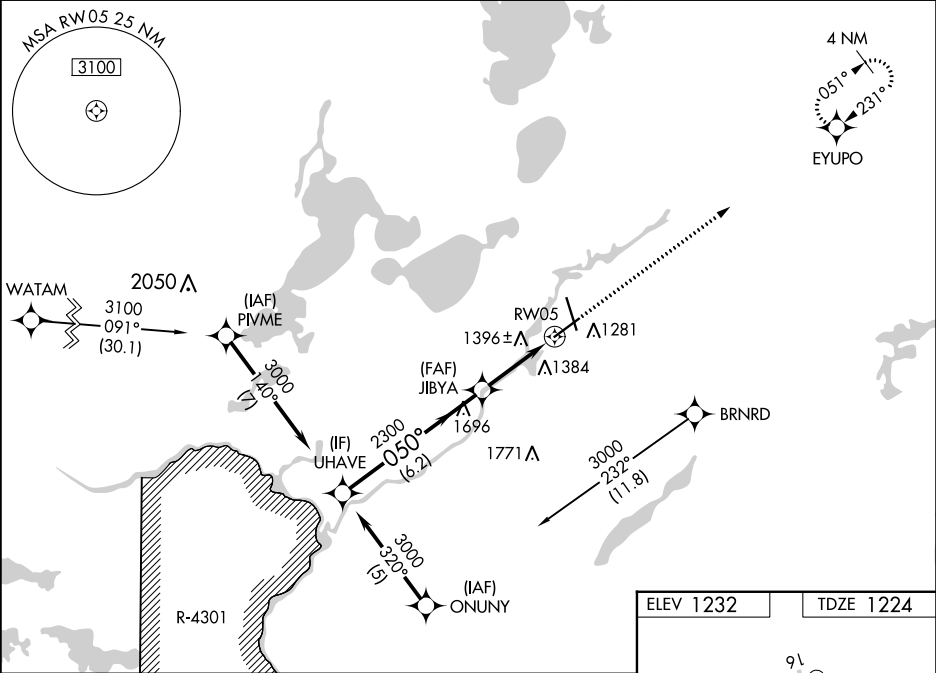

UHAVE		3000		EYUPO	
GP 3.00°		050°		*1.4 NM to RW05	
TCH 46		2300		*LNAV only	
		6.2 NM		1.9 NM	
		JIBYA		RW05	
		2300			
CATEGORY		A	B	C	D
LPV DA		1424-¾		200 (200-¾)	
LNAV/VNAV DA		1777-2		553 (600-2)	
LNAV MDA		1700-1	476 (500-1)	1700-1½ 476 (500-1½)	1700-1½ 476 (500-1½)
CIRCLING		1760-1	528 (600-1)	1760-1½ 528 (600-1½)	1860-2 628 (700-2)

