

|                           |                        |                                                   |
|---------------------------|------------------------|---------------------------------------------------|
| LOC I-TIW<br><b>109.1</b> | APP CRS<br><b>167°</b> | Rwy Idg<br>TDZE <b>294</b><br>Apt Elev <b>295</b> |
|---------------------------|------------------------|---------------------------------------------------|

ILS or LOC RWY 17

TACOMA NARROWS (TIW)



⚠ When control tower closed, obtain local altimeter setting on UNICOM, when not received, use McChord Fld altimeter setting minimums.

⚠ Circling not authorized east of Rwy 17-35.

MALSR

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 via heading 290° and SEA VORTAC R-227 to SCENN INT and hold.

|                       |                                       |                                              |                         |                         |
|-----------------------|---------------------------------------|----------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>124.05</b> | SEATTLE APP CON<br><b>120.1 290.9</b> | TACOMA TOWER★<br><b>118.5 (CTAF) 0 253.5</b> | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---------------------------------------|----------------------------------------------|-------------------------|-------------------------|

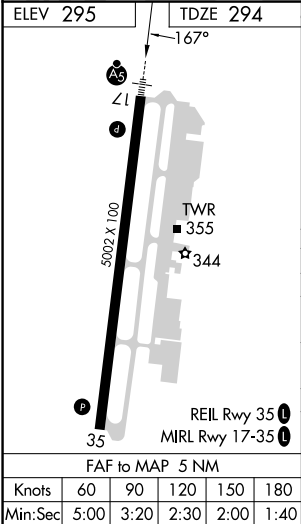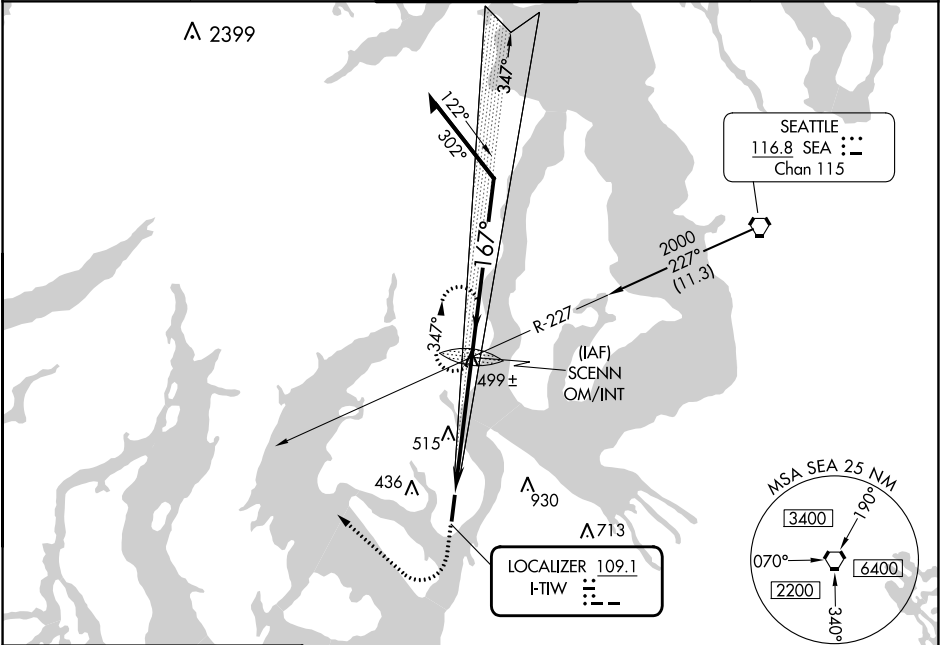

|                                        |                    |             |                        |                      |                     |
|----------------------------------------|--------------------|-------------|------------------------|----------------------|---------------------|
| 1500                                   | 2000               | SEA R-227   | SCENN INT              | SCENN OM/INT         | Remain within 10 NM |
| 167°                                   | hdg 290°           |             |                        | 1964                 | 347°                |
|                                        |                    |             |                        | 2000                 | 167°                |
|                                        |                    |             |                        | 2000                 | GS 3.00°            |
|                                        |                    |             |                        | 5 NM                 | TCH 52              |
| CATEGORY                               | A                  | B           | C                      | D                    |                     |
| S-ILS 17                               | 494-1½ 200 (200-½) |             |                        |                      |                     |
| S-LOC 17                               | 760-½              | 466 (500-½) | 760-¾<br>466 (500-¾)   | 760-1<br>466 (500-1) |                     |
| CIRCLING                               | 760-1              | 465 (500-1) | 820-1½<br>525 (600-1½) | 860-2<br>565 (600-2) |                     |
| MCCHORD FLD ALTIMETER SETTING MINIMUMS |                    |             |                        |                      |                     |
| S-ILS 17                               | 519-½ 225 (300-½)  |             |                        |                      |                     |
| S-LOC 17                               | 780-½              | 486 (500-½) | 780-¾<br>486 (500-¾)   | 780-1<br>486 (500-1) |                     |
| CIRCLING                               | 800-1              | 505 (600-1) | 860-1½<br>565 (600-1½) | 900-2<br>605 (700-2) |                     |