

LOC I-HYS 111.5	APP CRS 339°	Rwy Idg TDZE Apt Elev	6501 1994 1999
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 34

HAYS RGNL (HYS)

ADF required.


When local altimeter setting not received, use Russell altimeter setting: increase DA to 2263 feet; increase all MDA 80 feet and visibility S-LOC 34 Cat C and Circling Cat C and D ¼ SM. For inoperative MALSR when using Russell altimeter setting, increase S-ILS all Cats visibility to 1.

MALSR

MISSED APPROACH: Climb to 2600 then climbing right turn to 3800 direct NETTE LOM/HYS 4.8 DME and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

ADF or DME REQUIRED

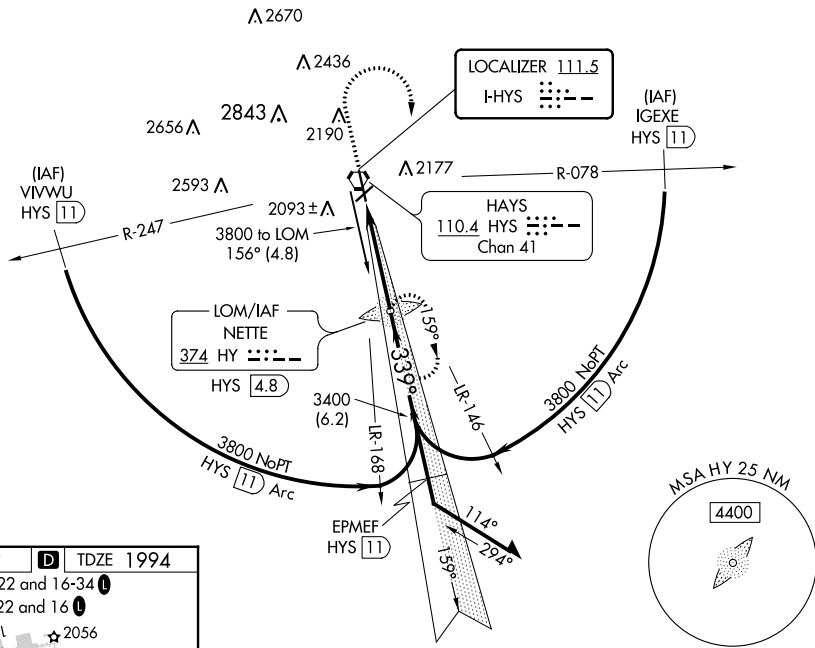

ELEV 1999 D TDZE 1994

MIRL Rwy 4-22 and 16-34

REIL Rwy 4, 22 and 16

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

2600	3800	HY	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 43).		
			Remain within 10 NM		
HYS VORTAC HYS 0.8			GS 3.00° TCH 45		
CATEGORY	A	B	C	D	
S-ILS 34	2194-½ 200 (200-½)				
S-LOC 34	2340-½ 346 (400-½) 2340-¾ 346 (400-¾)				
CIRCLING	2480-1 481 (500-1)		2560-1½ 561 (600-1½)		2680-2¼ 681 (700-2¼)

NC-2, 18 APR 2024 to 16 MAY 2024

NC-2, 18 APR 2024 to 16 MAY 2024