


AWOS-3  
121.25  
UNICOM  
122.7 (CTAF)  
POTOMAC DEP CON  
125.525 291.625

TOP ALTITUDE:  
ASSIGNED BY ATC

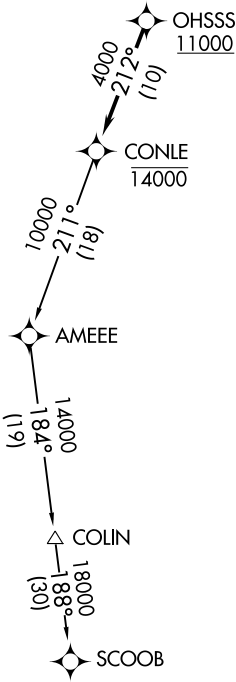

NOTE: RNAV 1.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RADAR required.  
NOTE: For turbojet aircraft only.

TAKEOFF MINIMUMS:  
Rwy 16: 400-2¾ or standard with minimum climb  
of 225' per NM to 1400.  
Rwy 34: Standard.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading to ATC assigned altitude, for vectors to cross OHSSS at or above 11000, then on track 212° to cross CONLE at or below 14000, then on assigned transition. Expect filed altitude within 10 minutes after departure.

COLIN TRANSITION (CONLE4.COLIN)  
SCOOB TRANSITION (CONLE4.SCOOB)