


LOC I-RUQ 109.95	APP CRS 202°	Rwy Idg 5501 TDZE 772 Apt Elev 772
----------------------------	------------------------	---

ILS or LOC RWY 20
MID-CAROLINA RGNL (BUQ)

T NA	ADF required. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase S-LOC Cats C/D visibility $\frac{1}{8}$ SM and Circling Cat D visibility $\frac{1}{4}$ SM. For inop ALS when using Lexington altimeter setting, increase S-LOC 20 Cats C and D visibility to $\frac{1}{4}$ mile.	MALSR 	MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct ROVDY LOM and hold.
-------------------------------	---	--	---

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	CLNC DEL 127.35	UNICOM 122.725 (CTAF) 0
--------------------------	---	---------------------------	-----------------------------------

ADF REQUIRED

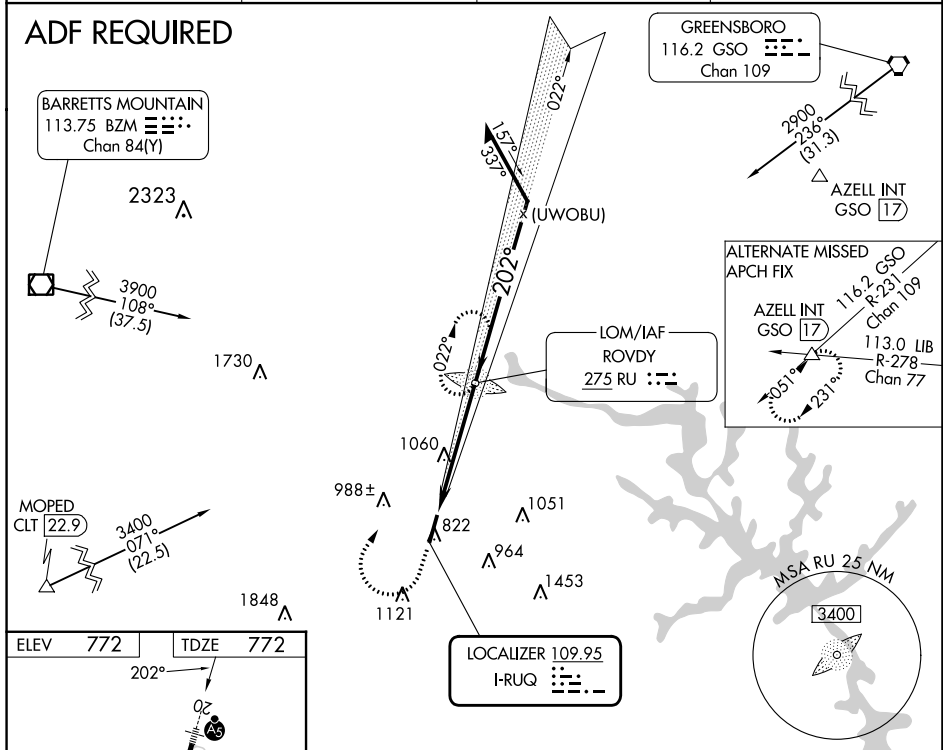

SE-2, 16 MAY 2024 to 13 JUN 2024