

WAAS CH 82134 W26A	APP CRS 258°	Rwy Idg TDZE 209 Apt Elev 239	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 26

CHERAW MUNI/LYNCH BELLINGER FLD (CQW)


▼

▲

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Darlington altimeter setting and increase all DA 44 feet, all MDA 60 feet, LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C/D and Circling Cat C/D visibility 1/4 mile. Helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Procedure NA at night.

MISSED APPROACH:
Climb to 2500 direct YOVL and hold.

AWOS-3 124.825	FLORENCE APP CON ★ 118.6 341.7	UNICOM 122.8 (CTAF) ①
--------------------------	--	---------------------------------

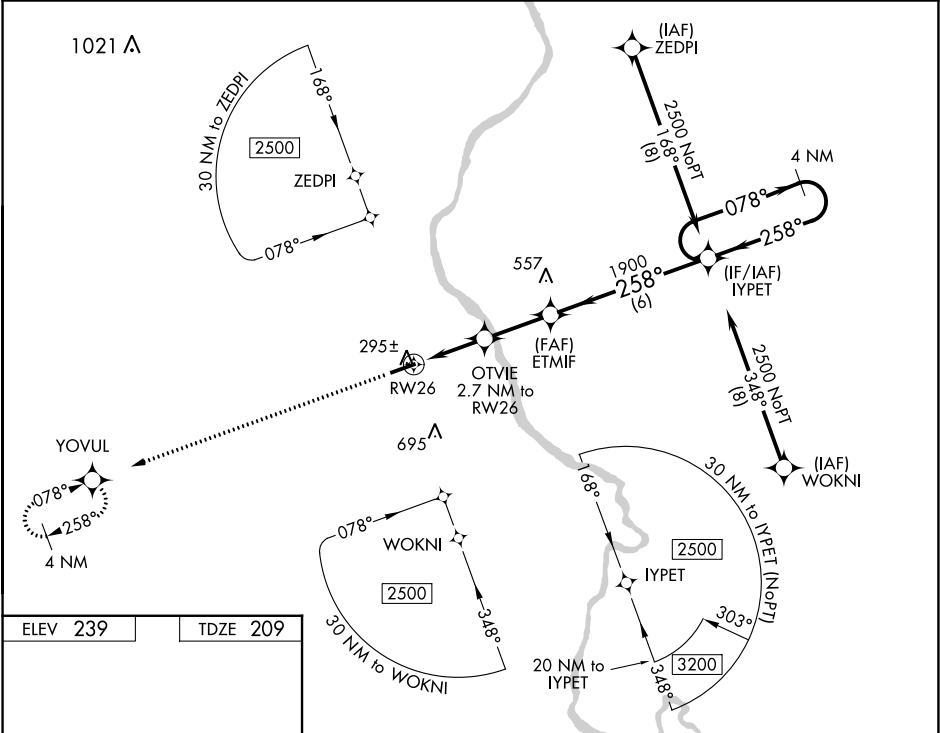

ELEV 239	TDZE 209	2500 YOVL VGS1 and RNAV glidepath not coincident.			
*LNAV only.					
RW26					
2.7 NM to RW26					
2.7 NM		2.5 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA	459-1		250 (300-1)		
LNAV/VNAV DA	578-1 1/4		369 (400-1 1/4)		
LNAV MDA	560-1		351 (400-1)		
CIRCLING	700-1 461 (500-1)		1060-2 1/2 821 (900-2 1/2)		1060-2 3/4 821 (900-2 3/4)

SE-2, 16 MAY 2024 to 13 JUN 2024

SE-2, 16 MAY 2024 to 13 JUN 2024