


VORTAC MLU	APP CRS	Rwy Idg	N/A
117.2	026°	TDZE	N/A
Chan 119		Apt Elev	168

VOR/DME-A

MOREHOUSE MEML (BQP)

▼ ▲ NA When local altimeter setting not received, use Monroe altimeter setting and increase all MDA 60 feet and Cat C visibility ¼ mile.	MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 via MLU R-038 to GALIO/MLU 15.6 DME and hold.
---	---

AWOS-3PT 118.375	MONROE APP CON★ 126.9 307.9	UNICOM 122.8 (CTAF) 0
---------------------	--------------------------------	--------------------------

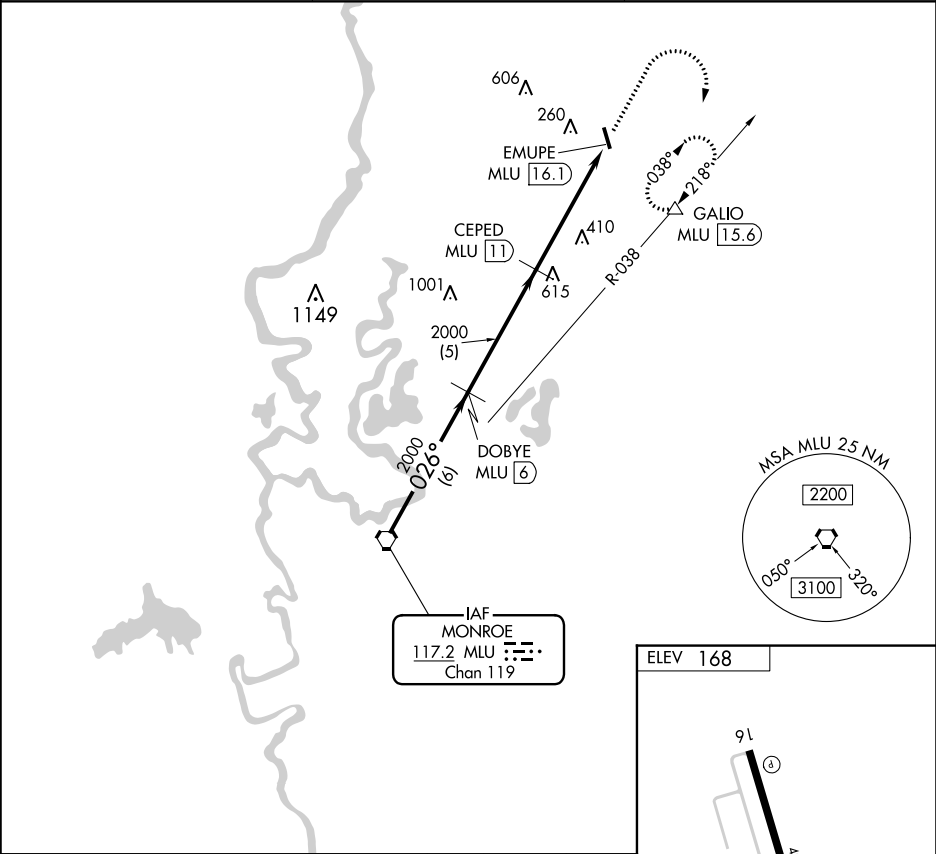

MLU VORTAC	DOBYE MLU 6	CEPED MLU 11	2000	3000	GALIO
2000	2000	2000	EMUPE MLU 16.1	MLU R-038	△
Procedure Turn NA	6 NM	5 NM	5.1 NM	026° 5.1 NM from FAF	91 34
CATEGORY	A	B	C	D	
CIRCLING	720-1 552 (600-1)	780-1 612 (700-1)	820-1¾ 652 (700-1¾)	NA	

ELEV 168

MIRL Rwy 16-34 0
REIL Rwy 16 and 34 0