

WAAS
CH **99302**
W01A

APP CRS
010°

Rwy Idg
TDZE **1255**
Apt Elev **1255**

RNAV (GPS) RWY 1

NEOSHO HUGH ROBINSON (E/O S)

⚠

Baro-VNAV NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.


⚠

Visibility reduction by helicopters NA. When local altimeter setting not received, use Joplin altimeter setting and increase all DA 87 feet and all MDA 100 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ⅔ mile, and LNAV Cat C visibility ¼ mile. When VGSI inop, Straight-in/Circling to Rwy 1 NA at night.

MISSED APPROACH:
Climb to 3200 direct TOGAS and hold.

KANSAS CITY CENTER
128.6 282.325

AUNICOM
122.8 (CTAF) 0

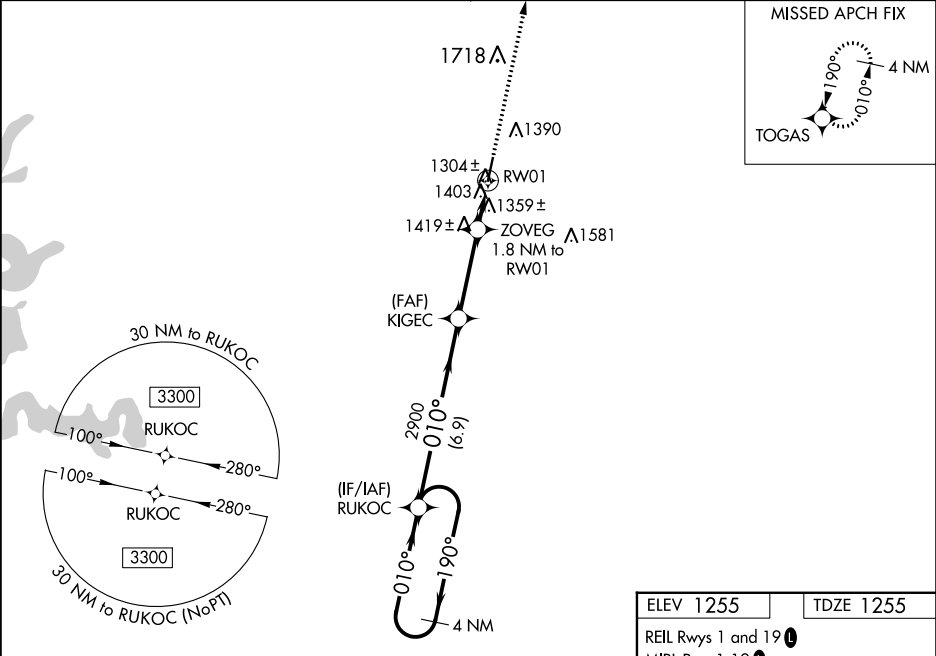

4 NM Holding Pattern

3200 TOGAS

3300 ←190°

010° →

GP 3.00°

TCH 31

2900

2900

1840

6.9 NM

3.3 NM

1.8 NM

CATEGORY

A

B

C

D

LPV DA

1505-1

250 (300-1)

NA

LNAV/VNAV DA

1658-1⅓

403 (500-1⅓)

NA

LNAV MDA

1680-1

425 (500-1)

1680-1¼

425 (500-1¼)

NA

CIRCLING

1720-1

1740-1

1740-1½

465 (500-1)

485 (500-1)

485 (500-1½)

NA