

WAAS CH 49032 W14A	APP CRS 142°	Rwy Idg TDZE 1132 Apt Elev 1136
--	------------------------	---

RNAV (GPS) RWY 14



MORRIS MUNI/CHARLIE SCHMIDT FLD (MOX)

RNP APCH-GPS.

Circling NA to Rwy 4 and 22. Baro-VNAV and VDP NA when using Benson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Benson altimeter setting and increase LPV and LNAV/VNAV DA to 1440 feet. Increase all MDAs 60 feet and visibility LNAV Cat C ½ SM and visibility Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3500 direct EXJUP and hold.

AWOS-3PT 118.6	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

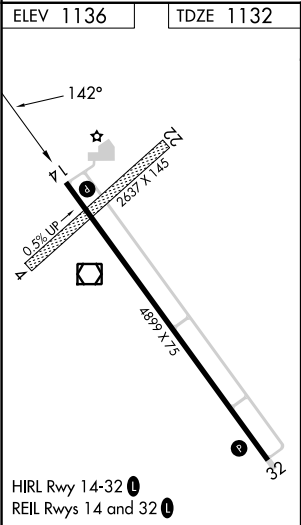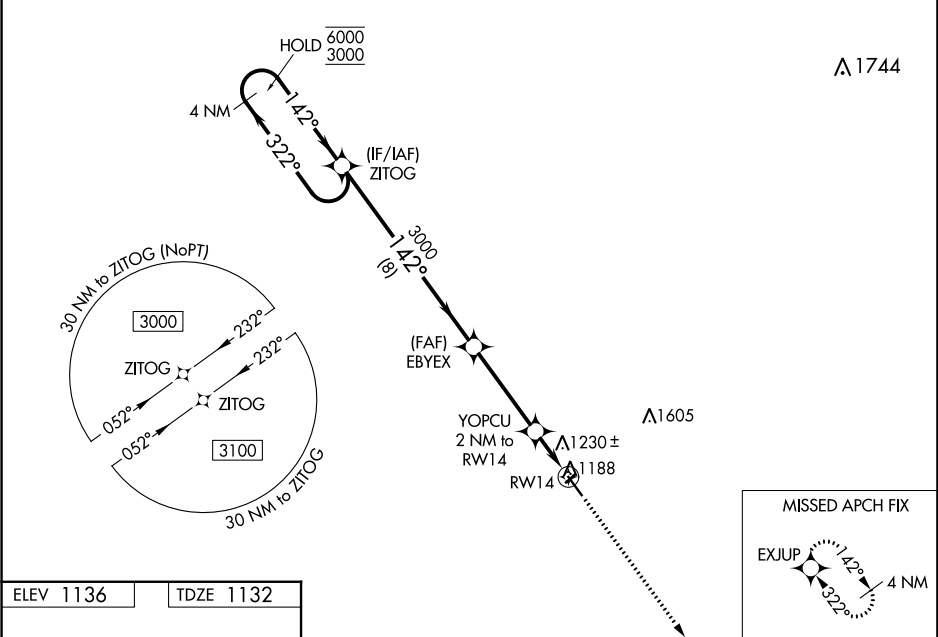

4 NM Holding Pattern 6000 ← 322° 3000 → 142° GP 3.00° TCH 40 ZITOG EBYEX YOPCU 2 NM to RWY 14 3000 3000 1800 8 NM 3.8 NM 1 NM 1 NM				3500 EXJUP
CATEGORY	A	B	C	D
LPV DA	1382-1	250 (300-1)		NA
LNAV/VNAV DA	1382-1	250 (300-1)		NA
LNAV MDA	1480-1	348 (400-1)		NA
CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA