

WAAS CH 50309 W22A	APP CRS 218°	Rwy Idg 5420 TDZE 161 Apt Elev 163
--	------------------------	---

RNAV (GPS) RWY 22

MC MINNVILLE MUNI (MMV)


RNP APCH.

Baro-VNAV NA when using Aurora State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Aurora State altimeter setting; increase LPV DA to 534 feet, LNAV/VNAV DA to 703 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats to 1 ¾ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ¾ SM. For inop ALS when using Aurora State altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ¾ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ¾ SM. VDP NA when using Aurora State altimeter setting.

MALSR

MISSED APPROACH:
Climb to 4900 direct OVUGE then on 218° track to PUCIV and hold, continue climb-in-hold to 4900.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 1
------------------------	--	--	---------------------------	--

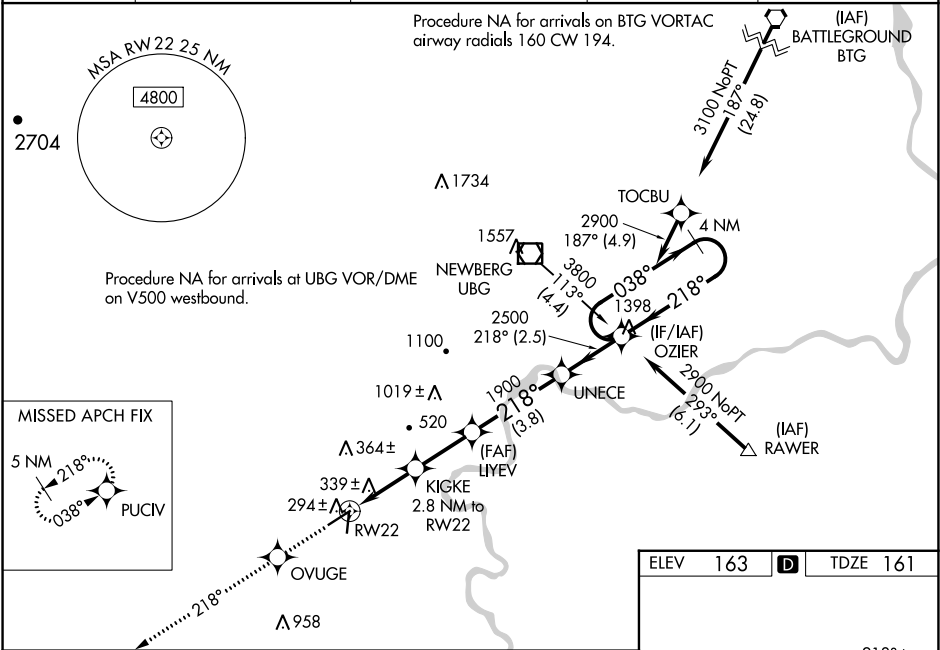

4900	OVUGE	218° tr	PUCIV
* LNAV only	KIGKE 2.8 NM to RW22	LIYEV 1900	UNECE
* 1.7 NM to RW22	1100*	1900	OZIER 4 NM Holding Pattern
1.7	1.1	2.4 NM	3.8 NM
2.5 NM			
CATEGORY	A	B	C
LPV DA	474-¾	313 (400-¾)	
LNAV/VNAV DA	643-1¼	482 (500-1¼)	
LNAV MDA	740-¾	579 (600-¾)	740-1¼ 579 (600-1¼)

