

WAAS CH 86536 W09A	APP CRS 094°	Rwy Idg TDZE 32 Apt Elev 34	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 9


SPACE COAST RGNL (TIX)

⚠

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 46°C (115°F). When local altimeter setting not received, use Melbourne altimeter setting and increase all LPV DA to 352 feet, increase all LNAV/VNAV DA to 407 feet and all visibilities ¼ SM; increase all LNAV MDAs 60 feet and Cat C and D visibility ¼ SM. Rwy 9 helicopter visibility reduction below ¼ SM NA. VDP and Baro-VNAV NA when using Melbourne altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2800 direct CUJEN and hold.

ATIS 120.625	ORLANDO APP CON 134.95 281.425	SPACE COAST TOWER ★ 118.9 (CTAF) 0	GND CON 121.85	UNICOM 122.95
------------------------	--	--	--------------------------	-------------------------

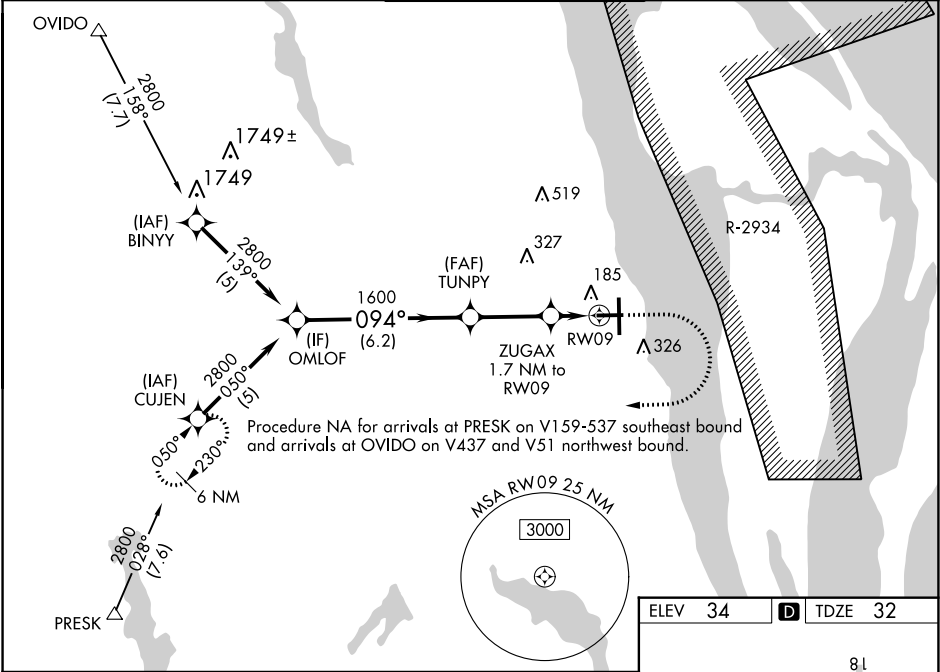

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 42).				
OMLOF				
2800				
094°				
1600				
TUNPY				
1600				
ZUGAX				
1.7 NM to RW09				
* 1.1 NM to RW09				
* 640				
* LNAV only				
GP 3.10° TCH 60				
6.2 NM				
2.9 NM				
0.6 NM				
1.1 NM				
CATEGORY	A	B	C	D
LPV DA		292-1	260 (300-1)	
LNAV/VNAV DA		347-1	315 (400-1)	
LNAV MDA	420-1	388 (400-1)	420-1 ⅓	388 (400-1 ⅓)
CIRCLING	640-1	606 (700-1)	640-1 ¾	606 (700-1 ¾)

ELEV 34 D TDZE 32

8.1
7319 X 150
27
5000 X 100
094° to RW09
TWR 98
97
36
MIRL Rwy 9-27
HIRL Rwy 18-36
REIL Rws 9, 18, 27