

WAAS CH 73027 W36A	APP CRS 359°	Rwy Idg 5210 TDZE 74 Apt Elev 75
--	------------------------	---

RNAV (GPS) RWY 36
ST LANDRY PARISH (OPT.)


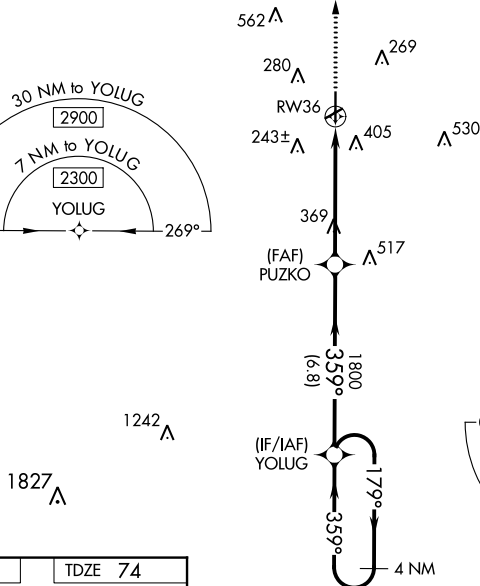


ST LANDRY PARISH (OPL)

V Baro-VNAV NA when using Lafayette alimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When VGSi inop, Straight-in/Circling Rwy 36 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Circling to Rwy 6/24 NA at night. When local alimeter setting not received, use Lafayette alimeter setting: Increase LPV DA to 407 feet, LNAV/VNAV DA to 749 feet, and visibility LPV all Cats ½ SM and LNAV/VNAV all Cats ¼ SM; increase all MDA 60 feet and visibility LNAV Cats C and D ½ SM and Circling Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2000 direct JUGBO and hold.


AWOS-3PT
118.775

LAFAYETTE APP CON★
128.7 268.7

UNICOM
123.0 (CTAF) 

ELEV 75

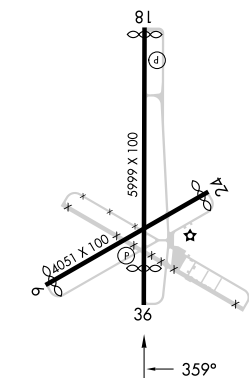
TDZE 74



REIL Rwy 18 and 36 **L**
MIR Rwy 18-36 **L**

2000	JUGBO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 59).
------	-------	--

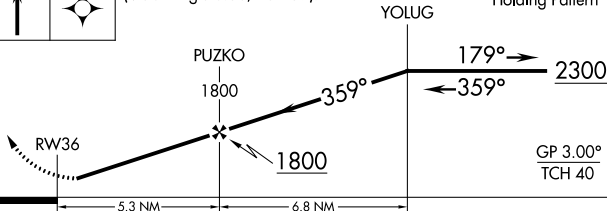4 NM
Holding Pattern



CATEGORY	A	B	C	D
LPV DA	351-1 277 (300-1)			
LNAV/VNAV DA	693-2 ¹ / ₄ 619 (700-2 ¹ / ₄)			
LNAV MDA	620-1 546 (600-1)	620-1 ⁵ / ₈ 546 (600-1 ⁵ / ₈)		
CIRCLING	780-1 705 (800-1)	780-2 705 (800-2)	920-2 ³ / ₄ 845 (900-2 ³ / ₄)	